




AccurioPress C3080/C3080P/C3070  
AccurioPrint C3070L



# Specification & Installation Guide

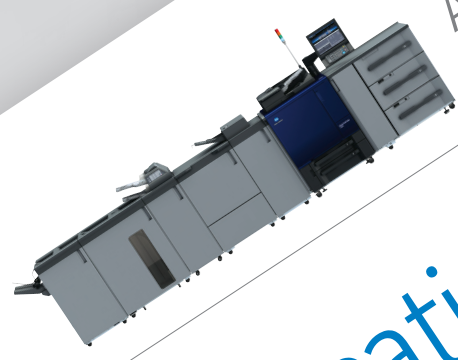

KONICA MINOLTA

**Specification & Installation Guide**  
**AccurioPress C3080/C3080P/C3070**  
**AccurioPrint C3070L**

Engine Specifications				
Type	Console Type			
Color	Full-Color			
Copy Method	4-coupled drum tandem laser electrostatic method			
<b>Print Speed</b>				
	<b>C3080/C3080P</b>	<b>8.5" x 11"</b>	<b>11" x 17"</b>	<b>13" x 19"</b>
	62-216 gsm	80 ppm	44 ppm	35 ppm
	217-350 gsm	51 ppm	27 ppm	24 ppm
	<b>C3070/C3070L</b>	<b>8.5" x 11"</b>	<b>11" x 17"</b>	<b>13" x 19"</b>
	Color - 62-216 gsm	70 ppm	38 ppm	33 ppm
	Color - 217-350 gsm	45 ppm	25 ppm	23 ppm
	B/W - 62-216 gsm	80 ppm	44 ppm	35 ppm
	B/W - 217-350 gsm	45 ppm	25 ppm	23 ppm
<b>Duty Cycle</b>				
	AccurioPress C3080/C3080P	Up to 864,000 monthly*		
		*Maximum monthly copy/print volume supported under standard vendor supplied service. Defines the upper end of the expected customer volume for the device. Customers should consider multiple machines if average monthly volume approaches duty cycle on continual basis.		
	AccurioPress C3070/AccurioPrint C3070L	Up to 758,000 monthly*		
		*Maximum monthly copy/print volume supported under standard vendor supplied service. Defines the upper end of the expected customer volume for the device. Customers should consider multiple machines if average monthly volume approaches duty cycle on continual basis.		
<b>Resolution</b>				
	Print	1200 x 1200 x 8 bit (3600 dpi x 1200 dpi)		
	Scan	600 x 600		
<b>Media Handling</b>				
	<b>Media Size</b>			
	Min.	100 x 148 mm (only PFU trays or bypass)		
	Max.	330.2 x 1300 mm		
	<b>Paper Weight</b>			
		62 – 350 gsm (350 gsm only with PF-707)		
<b>Image Loss</b>				
		Leading edge: 4 mm or less, Trailing edge: 4.5 mm or less, Right/left edge: 3 mm or less For Thick papers (200 gsm or more) Trailing edge: 6 mm or less Leading edge: 7 mm or less Right/left edge: 6 mm or less		
<b>Max. Printable area</b>				
		323 x 480 mm (1195 mm for Banners)		


*continued*

Engine Specifications		
<b>Memory</b>		
System Memory	Image memory: 5 GB (4 GB for C3080P) System memory: C3080/C3070/C3070L (10 GB C3080P: 4 GB) <b>C3080/C3070</b> Main body – 10 GB Main body + IC-605A – 14 GB Main body + VI-511 – 14 GB Main body + IC-605A + VI-511 – 18 GB Main body + IC-605A + UK-104 + VI-511 – 20 GB <b>C3080P</b> Main body – 4 GB Main body + IC-605A – 12 GB Main body + VI-511 – 8 GB Main body + IC-605BA + VI-511 – 16 GB Main body + IC-605B + UK-104 + VI-511 – 20 GB <b>C3070L</b> Main body – 10 GB Main body + IC-605A – 14 GB	
Hard Disk	<b>C3080/C3070</b> Maximum 3.5TB: 1TB x 3 (Standard of the main body) +500GB (UK-104) <b>C3080P</b> Maximum 3.5TB: 1TB x 3 (IC-605B) + 500GB (UK-104) <b>C3070L</b> Maximum 3TB: 1TB x 3 (Standard of the main body)	
Gradation	256 (8 bit)	
Warm-Up Time	390 sec. or less	
	<b>C3080/C3080P</b>	<b>C3070/C3070L</b>
First Page Output Time – Monochrome	4.2 sec	4.2 sec.
First Page Output Time – Color	6.5 sec	6.9 sec
<b>Noise</b>		
Under Operation	8.1 bels	
Stand-by	6.5 bels	
Operation Area	LCD Touch panel + Hard Key	
Drum Charging method	Negative corona drum charge method (Scorotron system)	
Developing method	Dry-type dual-component reverse magnetic brush developing	
Image Transfer	1) Method: Intermediate transfer belt 2) 1st Transfer: Bias applied roller transfer method 3) 2nd Transfer: Bias applied roller transfer method 4) Belt Cleaning Method: Belt surface polishing by residual toner + rubber blade in direct contact 5) Intermediate Transfer Belt: Tubular molded belt with semi-conductive film	

*continued*

## Specification & Installation Guide


AccurioPress C3080/C3080P/C3070  
AccurioPrint C3070L

Engine Specifications	
Separation method	Corona separation by comb electrode + Three low pressure mechanism pawls
Fusing Type	1) Method: Belt fusing system 2) Heating System: Halogen lamp heating
Dimensions (W x D x H)	31.5" x 35.6" x 42.4" Excluding the control panel, output tray, work table. Including the rear duct. Height to the top of the original cover excluding the control panel.
Weight	697 lb (316 kg) main body only
Electrical	
Power Source	AC208 to 240V 24A 60Hz
NEMA Part No.	L6-30R 
Power Consumption	<b>C3080/C3080P/C3070:</b> 5,760W or less (For the whole system excluding the options with a dedicated power code) <b>C3070L:</b> 3,840W or less (For the whole system excluding the options with a dedicated power code)
Operating Environment	
Temperature	50°F to 86°F
Humidity	10% to 80% RH (with no condensation)
Security	ISO 15408 EAL3


# Specification & Installation Guide

## AccurioPress C3080/C3080P/C3070 AccurioPrint C3070L


### Space Requirements — AccurioPress C3080/C3080P/C3070

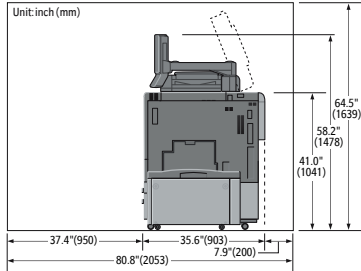


Side View  
**AccurioPressS C3080/C3070 + OT-511 + DF-706 + LU-202m**




Front View  
**AccurioPress C3080/C3070 + OT-511 + DF-706 + MB-506**




Front View  
**AccurioPress C3080/C3070 + OT-511 + OC-511 + MB-506**

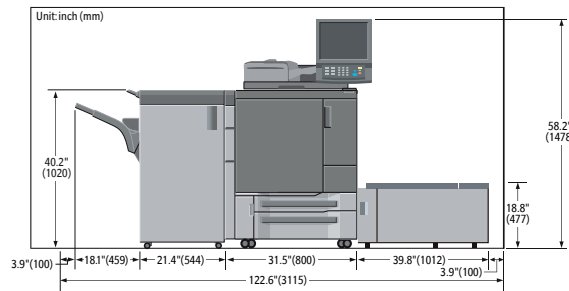

Front View  
**AccurioPress C3080/C3070 + OT-510 + DF-706 + LU-202XL**

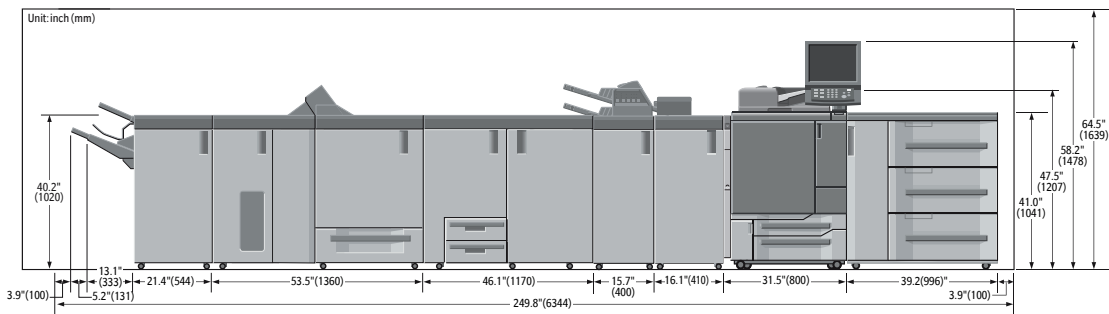


Front View  
**AccurioPress C3080/C3070 + FS-532 + PB-503 + SD-506 + FD-503 + RU-518 + DF-706 + PF-707**

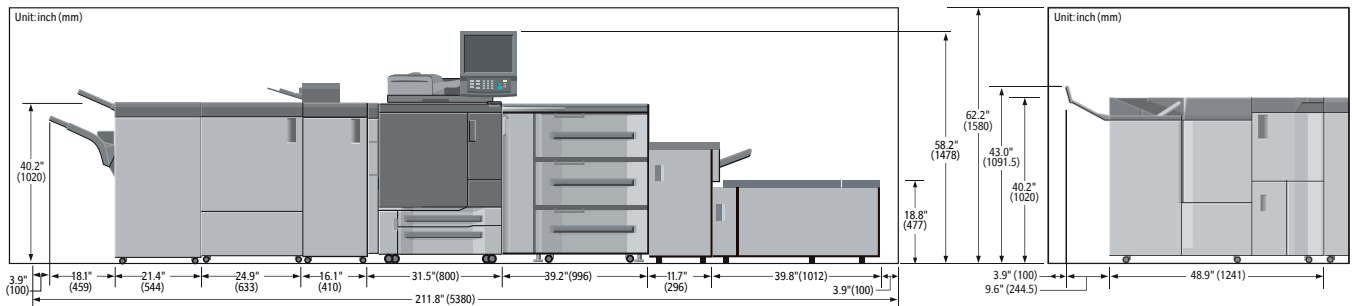


Front View  
**AccurioPress C3080/C3070 + FS-532 + IQ-501 + RU-518 + DF-706 + PF-707m + MB-508 + LU-202XLm**

**SD-513 Saddle Stitcher**  
Option (Depth is 56.33" (1431))


Space Requirements — AccurioPrint C3070L




Front View  
**AccurioPress C3070L**

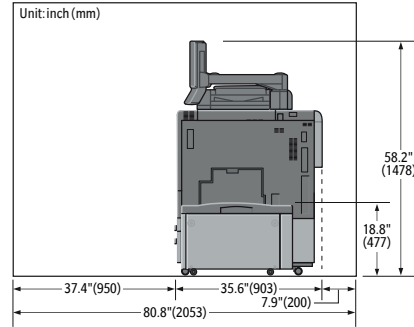

Side View  
**AccurioPressS C3070L +  
 OT-510 + DF-706 + LU-202XL**

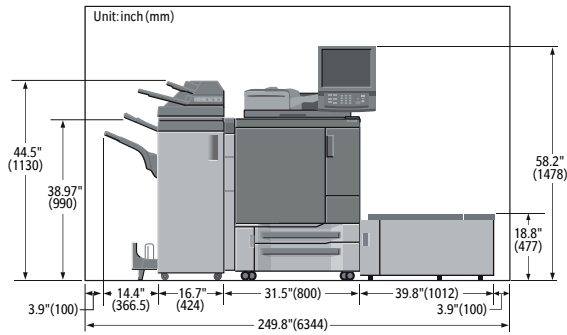

Front View  
**AccurioPress C3070L + FS-612 + DF-706 + LU-202XL**

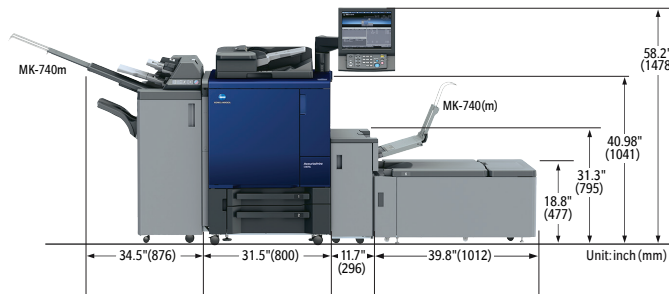


Front View  
**AccurioPress C3070L + OT-510 + MB-508 + LU-202XL**

# Specification & Installation Guide

## AccurioPress C3080/C3080P/C3070 AccurioPrint C3070L

### System Configurations — AccurioPress C3080/C3080P/C3070

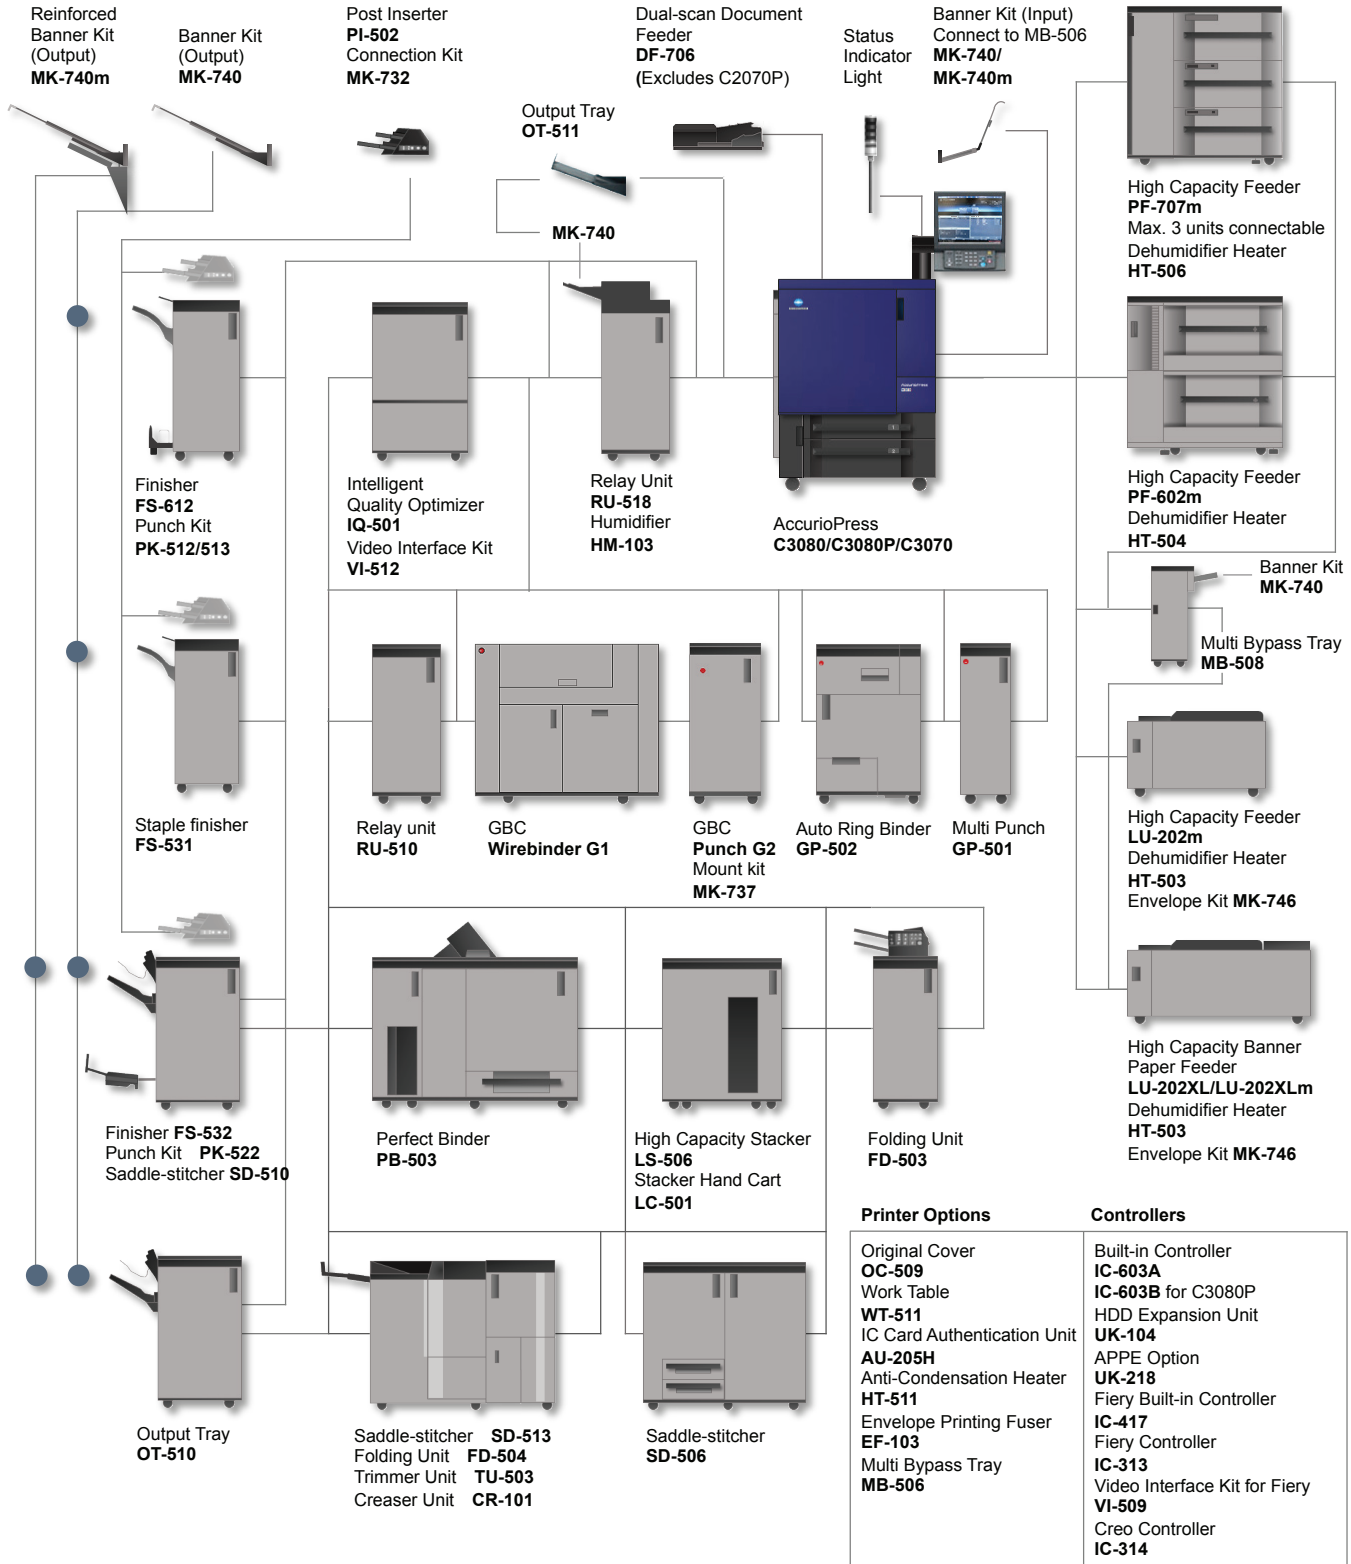

**System Configurations — AccurioPress C3080/C3080P/C3070**

**MAIN BODY AND PAPER FEED OPTIONS**

Config Number					Electrical Requirements
1			MB-506 <sup>*4</sup>	Main body	—
2			LU-202m <sup>*1</sup> / LU-202XL <sup>*1</sup> / LU-202XLm <sup>*1*7</sup>	Main body	External (HT-515 <sup>*7</sup> )
3			PF-602m <sup>*2</sup>	Main body	External (HT-504)
4			PF-707m <sup>*3</sup>	Main body	External (PF-707m)
5		PF-707m <sup>*3</sup>	PF-707m <sup>*3*5</sup>	Main body	External (Each PF-707m)
6	PF-707m <sup>*3</sup>	PF-707m <sup>*3*5</sup>	PF-707m <sup>*3*5</sup>	Main body	External (Each PF-707m)
7		LU-202m <sup>*1</sup> / LU-202XL <sup>*1</sup> / LU-202XLm <sup>*6</sup>	MB-506 <sup>*4</sup>	Main body	External (HT-515 <sup>*6</sup> )
8		MB-508 <sup>*4</sup>	PF-707m <sup>*3*5</sup>	Main body	External (PF-707m)
9		LU-202XLm <sup>*1*6</sup>	PF-707m	Main body	External (PF-707m, HT-515 <sup>*6</sup> )
10	LU-202XLm <sup>*1*6</sup>	MB-508 <sup>*4</sup>	PF-707m <sup>*3*5</sup>	Main body	External (PF-707m, HT-515 <sup>*6</sup> )
11			No Paper Feed Option	Main body	-

\*1 HT-503 and MK-746 can be connected arbitrarily to LU-202m, LU-202XL and LU-202XLm. HT-503 can be connected to LU-202XLm only when LU-202XLm is connected to the Main body.

\*2 HT-504/HT-505 can be connected arbitrarily to PF-602m.

\*3 HT-506 can be connected arbitrarily to PF-707m.

\*4 MK-740/MK-740m (paper feed side) can be connected arbitrarily to MB-506.

\*5 Installation of FA-502 is required.

\*6 HT-515 can be connected arbitrarily to LU-202XLm when LU-202XLm is connected to the upstream of the PFU (Only for North America).



**System Configurations — AccurioPress C3080/C3080P/C3070**

**FINISHER CONFIGURATIONS**

Config No.									Electrical Requirements
1	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	LS-506				External (RU-518/IQ-501/FD-503/LS-506)
2	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	LS-506	FS-532 <sup>2</sup>			External (RU-518/IQ-501/FD-503/LS-506)
3	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-506				External (RU-518/IQ-501/FD-503)
4	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-513 <sup>7</sup>				External (RU-518/IQ-501/FD-503/SD-513)
5	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-506	PB-503	FS-532		External (RU-518/IQ-501/FD-503/PB-503)
6	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-513 <sup>7</sup>	PB-503	FS-532		External (RU-518/IQ-501/FD-503/SD-513/PB-503)
7	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-506	FS-532			External (RU-518/IQ-501/FD-503)
8	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-513 <sup>7</sup>	FS-532			External (RU-518/IQ-501/FD-503/SD-513)
9	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	PB-503	FS-532 <sup>2</sup>			External (RU-518/IQ-501/FD-503/PB-503)
10	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	PB-503				External (RU-518/IQ-501/FD-503/PB-503)
11	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-506	PB-503			External (RU-518/IQ-501/FD-503/PB-503)
12	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	SD-513 <sup>7</sup>	PB-503			External (RU-518/IQ-501/FD-503/PB-503)
13	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	FS-532 <sup>2</sup>				External (RU-518/IQ-501/FD-503)
14	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503					External (RU-518/IQ-501/FD-503)
15	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	LS-506	SD-506			External (RU-518/IQ-501/FD-503/LS-506)
16	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	LS-506	SD-513 <sup>7</sup>			External (RU-518/IQ-501/FD-503/LS-506/SD-513)
17	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	LS-506	PB-503			External (RU-518/IQ-501/FD-503/LS-506/PB-503)
18	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FD-503	LS-506	LS-506			External (RU-518/IQ-501/FD-503/LS-506)
19	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506					External (RU-518/IQ-501/LS-506)
20	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	SD-506				External (RU-518/IQ-501/LS-506)
21	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	SD-513 <sup>7</sup>				External (RU-509/IQ-501/LS-506/SD-513)
22	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	FS-532 <sup>3</sup>				External (RU-518/IQ-501/LS-506)
23	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	PB-503				External (RU-518/IQ-501/LS-506/PB-503)
24	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	SD-506	FS-532 <sup>4</sup>			External (RU-518/IQ-501/LS-506/SD-506)
25	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	SD-513 <sup>7</sup>	FS-532 <sup>4</sup>			External (RU-518/IQ-501/LS-506/SD-513)
26	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	SD-506	PB-503			External (RU-518/IQ-501/LS-506/SD-506/PB-503)
27	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	SD-513 <sup>7</sup>	PB-503			External (RU-518/IQ-501/LS-506/SD-513/PB-503)
28	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	PB-503	FS-532 <sup>3</sup>			External (RU-518/IQ-501/LS-506/PB-503)
29	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	LS-506				External (RU-518/IQ-501/LS-506)
30	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	LS-506	SD-506	SD-506		External (RU-518/IQ-501/LS-506/SD-506)

*continued*

**System Configurations — AccurioPress C3080/C3080P/C3070**

**FINISHER CONFIGURATIONS**

Config No.									Electrical Requirements
31	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	LS-506	SD-513 <sup>7</sup>	SD-513 <sup>7</sup>		External (RU-518/IQ-501/LS-506/SD-513)
32	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	LS-506	FS-532 <sup>3</sup>			External (RU-518/IQ-501/LS-506)
33	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	LS-506	LS-506	PB-503			External (RU-518/IQ-501/LS-506/PB-503)
34	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-506					External (RU-518/IQ-501)
35	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-513 <sup>7</sup>					External (RU-518/IQ-501/SD-513)
36	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-506	FS-532 <sup>4</sup>				External (RU-518/IQ-501)
37	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-513 <sup>7</sup>	FS-532 <sup>4</sup>				External (RU-518/IQ-501/SD-513)
38	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-506	PB-503				External (RU-518/IQ-501/SD-506/PB-503)
39	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-513 <sup>7</sup>	PB-503				External (RU-518/IQ-501/SD-513/PB-503)
40	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-506	PB-503	FS-532 <sup>4</sup>			External (RU-518/IQ-501/PB-503)
41	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	SD-513 <sup>7</sup>	PB-503	FS-532 <sup>4</sup>			External (RU-518/IQ-501/SD-513/PB-503)
42	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	PB-503					External (RU-518/IQ-501/PB-503)
43	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	PB-503	FS-532 <sup>3</sup>				External (RU-518/IQ-501/PB-503)
44	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	FS-532 <sup>3/9/10</sup>					External (RU-518/IQ-501)
45	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	OT-510 <sup>9/10</sup>					External (RU-518/IQ-501)
46	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	FS-532 <sup>3</sup>			External (RU-518/IQ-501/GP-501)
47	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	FD-503	FS-532 <sup>2</sup>		External (RU-518/IQ-501/GP-501/FD-503)
48	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	FD-503	FS-532		External (RU-518/IQ-501/GP-501/FD-503)
49	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	FD-503	SD-513 <sup>7</sup>	FS-532	External (RU-518/IQ-501/GP-501/FD-503/SD-513)
50	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	SD-506	FS-532 <sup>4</sup>		External (RU-518/IQ-501/GP-501)
51	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	SD-513 <sup>7</sup>	FS-532 <sup>4</sup>		External (RU-518/IQ-501/GP-501/SD-513)
52	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	LS-506	FS-532 <sup>3</sup>		External (RU-518/IQ-501/GP-501/LS-506)
53	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	LS-506	PB-503		External (RU-518/IQ-501/GP-501/LS-506/PB-503)
54	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	LS-506	SD-506		External (RU-518/IQ-501/GP-501/LS-506)
55	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	LS-506	SD-513 <sup>7</sup>		External (RU-518/IQ-501/GP-501/SD-513)
56	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501		RU-510	PB-503		External (RU-518/IQ-501/GP-501/PB-503)
57	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>8</sup>	GP-501	RU-510	PB-503	FS-532 <sup>3</sup>		External (RU-518/IQ-501/GP-501/PB-503)
58	Main body	RU-518 <sup>1</sup>	GP-502	FS-532 <sup>3</sup>					External (RU-518/GP-502)
59	Main body	RU-518 <sup>1</sup>	GP-502	FD-503	FS-532 <sup>2</sup>				External (RU-518/GP-502/FD-503)
60	Main body	RU-518 <sup>1</sup>	GP-502	SD-506	FS-532 <sup>4</sup>				External (RU-518/GP-502/SD-513)

*continued*

**System Configurations — AccurioPress C3080/C3080P/C3070**

**FINISHER CONFIGURATIONS**

Config No.									Electrical Requirements
61	Main body	RU-518 <sup>*1</sup>	GP-502	SD-513 <sup>*7</sup>	FS-532 <sup>*4</sup>				External (RU-518/ GP-502/LS-506)
62	Main body	RU-518 <sup>*1</sup>	GP-502	LS-506	FS-532 <sup>*3</sup>				External (RU-518/ GP-502/LS-506)
63	Main body	RU-518 <sup>*1</sup>	GP-502	LS-506	PB-503				External (RU-518/ GP-502/LS-506/ PB-503)
64	Main body	RU-518 <sup>*1</sup>	GP-502	LS-506	SD-506				External (RU-518/ GP-502/LS-506)
65	Main body	RU-518 <sup>*1</sup>	GP-502	LS-506	SD-513 <sup>*7</sup>				External (RU-518/ GP-502/ SD-513)
66	Main body	RU-518 <sup>*1</sup>	GP-502	PB-503					External (RU-518/ GP-502/PB-503)
67	Main body	RU-518 <sup>*1</sup>	GP-502	PB-503	FS-532 <sup>*3</sup>				External (RU-518/ GP-502/ PB-503)
68	Main body	RU-518 <sup>*1</sup>	GP-502	FD-503	SD-506	FS-532			External (RU-518/ GP-502/FD-503)
69	Main body	RU-518 <sup>*1</sup>	GP-502	FD-503	SD-513 <sup>*7</sup>	FS-532			External (RU-518/ GP-502/FD-503/ SD-513)
70	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	FD-503	SD-506	GP-502	FS-532		External (RU-518/ IQ-501/FD-503/ GP-502)
71	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	FD-503	SD-513 <sup>*7</sup>	GP-502	FS-532		External (RU-518/ IQ-501/ FD-503/ SD-513/GP-502)
72	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	FD-503	LS-506	GP-502	FS-532 <sup>*2</sup>		External (RU-518/ IQ-501/FD-503/ LS-506/ GP-502)
73	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	LS-506	MK-737	3rd Party Option			External (RU-518/ IQ-501/ LS-506/3rd Party Option)
74	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	LS-506	LS-506	MK-737	3rd Party Option		External (RU-518/ IQ-501/ LS-506/3rd Party Option)
75	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	FD-503	LS-506	MK-737	3rd Party Option		External (RU-518/ IQ-501/ LS-506/3rd Party Option)
76	Main body	RU-518 <sup>*1</sup>	IQ-501 <sup>*8</sup>	FD-503	LS-506	LS-506	MK-737	3rd Party Option	External (RU-518/ IQ-501/FD-503/ LS-506/3rd Party Option)
77	Main body	RU-518 <sup>*1</sup>	FS-612 <sup>*5*9</sup>						External (RU-518)
78	Main body	RU-518 <sup>*1</sup>	FS-531 <sup>*6*9</sup>						External (RU-518)
79	Main body	RU-518 <sup>*1</sup>	SD-506	OT-510					External (RU-518)
80	Main body	RU-518 <sup>*1</sup>	SD-513 <sup>*7</sup>	OT-510					External (RU-518)
81	Main body	RU-518 <sup>*1</sup>	OT-510 <sup>*9*10</sup>						External (RU-518)
82	Main body	FS-532 <sup>*3*9*10</sup>							-
83	Main body	OT-510 <sup>*9*10</sup>							-
84	Main body	OT-511 <sup>*9</sup>							-
85	Main body	FS-531 <sup>*6*9</sup>							-
86	Main body	FS-612 <sup>*5*9</sup>							-

\*1 HM-103 and MK-740 can be connected arbitrarily to RU-518. MK-740 cannot be connected to RU-518 when FD-503 or PI-502 is connected to RU-518.  
 \*2 SD-510 can be connected arbitrarily to FS-532.  
 \*3 SD-510, PK-522 or PI-502+MK-732 can be connected arbitrarily to FS-532.  
 \*4 PK-522 or PI-502+MK-732 can be connected arbitrarily to FS-532.  
 \*5 PI-502 and PK-512/513 can be connected arbitrarily to FS-612.

\*6 PI-502 and PK-512/513 can be connected arbitrarily to FS-531.  
 \*7 FD-504, TU-503, or CR-101 can be connected arbitrarily to SD-513.  
 \*8 You can arbitrarily select whether IQ-501 is installed. When it is installed, VI-511 must be installed.  
 \*9 MK-740 (paper exit side) can be connected arbitrarily to FS-531, FS-532, FS-612, OT-510 and OT-511.  
 \*10 MK-740m is only for the options FS-532 (W\*5 or later) and OT-510 (WY2 or later).

**System Configurations — AccurioPress C3080/C3080P/C3070 - GBC Punch G2 & Wirebinder G1**

**FINISHER CONFIGURATIONS**

Config No.														Electrical Requirements
1	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	FS-532 <sup>3</sup>								External (RU-518/GBC PUNCH G2)
2	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	FD-503	FS-532 <sup>2</sup>							External (RU-518/GBC PUNCH G2/FD-503)
3	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	FD-503	SD-506	FS-532						External (RU-518/GBC PUNCH G2/FD-503)
4	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	FD-503	SD-513 <sup>5</sup>	FS-532						External (RU-518/GBC PUNCH G2/FD-503/SD-513)
5	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	SD-506	FS-532 <sup>4</sup>							External (RU-518/GBC PUNCH G2)
6	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	SD-513 <sup>5</sup>	FS-532 <sup>4</sup>							External (RU-518/GBC PUNCH G2/SD-513)
7	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	LS-506	FS-532 <sup>4</sup>							External (RU-518/GBC PUNCH G2/LS-506)
8	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	LS-506	PB-503							External (RU-518/GBC PUNCH G2/LS-506/PB-503)
9	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	LS-506	SD-506							External (RU-518/GBC PUNCH G2/LS-506)
10	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	LS-506	SD-513 <sup>5</sup>							External (RU-518/GBC PUNCH G2/LS-506/SD-513)
11	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	PB-503								External (RU-518/GBC PUNCH G2/PB-503)
12	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	PB-503	FS-532 <sup>3</sup>							External (RU-518/GBC PUNCH G2/PB-503)
13	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532 <sup>3</sup>							External (RU-518/GBC PUNCH G2/GBC WIRE BINDER G1)
14	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FD-503	FS-532 <sup>2</sup>						External (RU-518/GBC PUNCH G2/GBC WIRE BINDER G1/FD-503)
15	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	SD-506	FS-532 <sup>4</sup>						External (RU-518/GBC PUNCH G2/GBC WIRE BINDER G1)
16	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	SD-513 <sup>5</sup>	FS-532 <sup>4</sup>						External (RU-518/GBC PUNCH G2/GBC WIRE BINDER G1/SD-513)
17	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	LS-506	FS-532 <sup>3</sup>						External (RU-518)
18	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	PB-503					External (RU-518/GBC PUNCH G2/GBC WIRE BINDER G1/LS-506/PB-503)
19	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	SD-506					External (RU-518/GBC PUNCH G2/GBC WIRE BINDER G1/LS-506)

continued

**System Configurations — AccurioPress C3080/C3080P/C3070 - GBC Punch G2 & Wirebinder G1**

**FINISHER CONFIGURATIONS**

Config No.													Electrical Requirements	
20	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	SD-513 <sup>5</sup>					External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/LS-506/SD-513)
21	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	PB-503							External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/ PB-503)
22	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	PB-503	FS-532 <sup>3</sup>						External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/ PB-503)
23	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	FD-503	SD-506	FS-532				External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/FD-503)
24	Main body	RU-518 <sup>1</sup>	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	FD-503	SD-513 <sup>5</sup>	FS-532				External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/FD-503/SD-513)
25	Main body	RU-518 <sup>1</sup>	FD-503	SD-506	RU-518	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532				External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/FD-503)
26	Main body	RU-518 <sup>1</sup>	FD-503	SD-513 <sup>5</sup>	RU-518	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532				External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/FD-503/SD-513)
27	Main body	RU-518 <sup>1</sup>	FD-503	LS-506	RU-518	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532 <sup>2</sup>				External (RU-518/GBC PUNCH G2/ GBC WIRE BINDER G1/FD-503/LS-506)
28	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	FS-532 <sup>3</sup>						External (RU-518/ IQ-501/ GBC PUNCH G2)
29	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	FD-503	FS-532 <sup>2</sup>					External (RU-518/ IQ-501/ GBC PUNCH G2/FD-503)
30	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	RU-518	FD-503	SD-506	FS-532			External (RU-518/ IQ-501/ GBC PUNCH G2/FD-503)
31	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	RU-518	FD-503	SD-513*5	FS-532			External (RU-518/ IQ-501/ GBC PUNCH G2/FD-503/ SD-513)
32	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	SD-506	FS-532 <sup>4</sup>					External (RU-518/IQ-501/ GBC PUNCH G2)
33	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	SD-513 <sup>5</sup>	FS-532 <sup>4</sup>					External (RU-518/IQ-501/ GBC PUNCH G2/SD-513)
34	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	LS-506	FS-532 <sup>3</sup>					External (RU-518/IQ-501/ GBC PUNCH G2/LS-506)
35	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	RU-518	LS-506	PB-503				External (RU-518/IQ-501/ GBC PUNCH G2/LS-506/ PB-503)
36	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	RU-518	LS-506	SD-506				External (RU-518/IQ-501/ GBC PUNCH G2/LS-506)
37	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	RU-518	LS-506	SD-513 <sup>5</sup>	/			External (RU-518/IQ-501/ GBC PUNCH G2/LS-506/ SD-513)
38	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>6</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	PB-503						External (RU-518/IQ-501/ GBC PUNCH G2/ PB-503)

*continued*


**System Configurations — AccurioPress C3080/C3080P/C3070 - GBC Punch G2 & Wirebinder G1**

**FINISHER CONFIGURATIONS**

Config No.														Electrical Requirements
39	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	PB-503	FS-532 <sup>3</sup>					External (RU-518/IQ-501/ GBC PUNCH G2/ PB-503)
40	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532 <sup>3</sup>					External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1)
41	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	FD-503	FS-532 <sup>2</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ FD-503)
42	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	SD-506	FS-532 <sup>4</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1)
43	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	SD-513 <sup>5</sup>	FS-532 <sup>4</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ SD-513)
44	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	FS-532 <sup>3</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ LS-506)
45	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	PB-503			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ LS-506/ PB-503)
46	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	SD-506			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ LS-506)
47	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	LS-506	SD-513 <sup>5</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ LS-506/ SD-513)
48	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	PB-503				External (RU-518/IQ-501/ RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ PB-503)
49	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	PB-503	FS-532 <sup>3</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ PB-503)
50	Main body	"RU-518*	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	FD-503	SD-506	FS-532		External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ FD-503)
51	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	RU-510	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	RU-518	FD-503	"SD-513	FS-532		External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ FD-503/ SD-513)
52	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	FD-503	SD-506	RU-518	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ FD-503)
53	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	FD-503	SD-513 <sup>5</sup>	RU-518	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ FD-503/ SD-513)
54	Main body	RU-518 <sup>1</sup>	IQ-501 <sup>16</sup>	FD-503	LS-506	RU-518	MK-737	GBC PUNCH G2	MK-737	GBC WIRE BINDER G1	FS-532 <sup>2</sup>			External (RU-518/IQ-501/ GBC PUNCH G2/ GBC WIRE BINDER G1/ FD-503/ LS-506)

<sup>1</sup> HM-103 and MK-740 (purge tray) can be connected arbitrarily to RU-518.  
<sup>2</sup> SD-510 can be connected arbitrarily to FS-532.  
<sup>3</sup> SD-510, PK-522 or PI-502+MK-732 can be connected arbitrarily to FS-532.  
<sup>4</sup> PK-522 or PI-502+MK-732 can be connected arbitrarily to FS-532.  
<sup>5</sup> FD-504, TU-503, or CR-101 can be connected arbitrarily to SD-513.  
<sup>16</sup> You can arbitrarily select whether IQ-501 is installed. When it is installed, VI-511 must be installed.

**System Configurations — AccurioPrint C3070L**

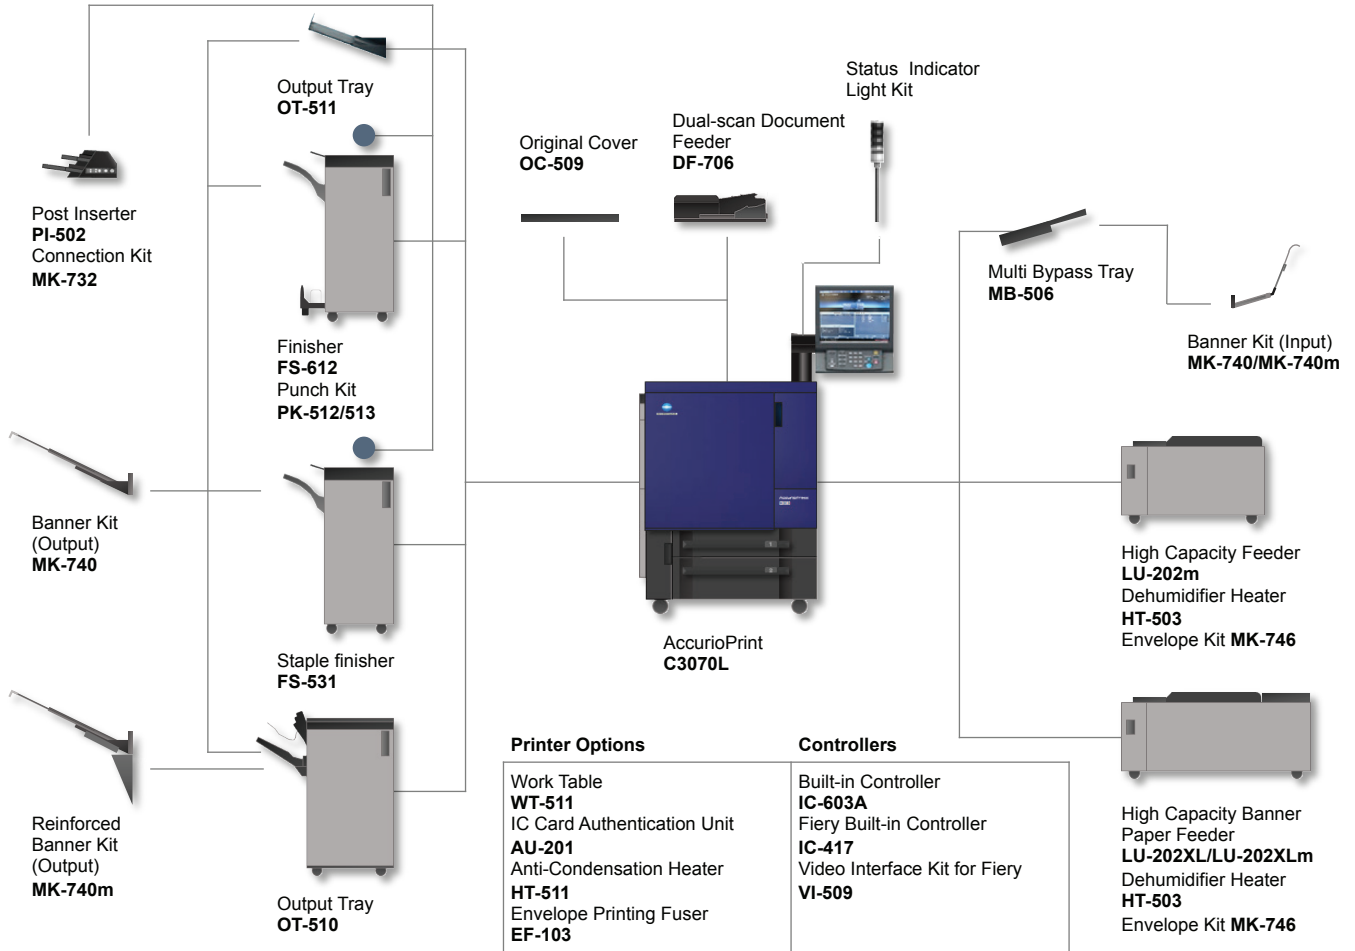

## System Configurations — AccurioPrint C3070L

### MAIN BODY AND PAPER FEED OPTIONS

Config Number				Electrical Requirements
1		MB-506 <sup>*2</sup>	Main body	-
2		LU-202m/LU-202XL/ LU-202XLm <sup>*1</sup>	Main body	-
3	LU-202m/LU-202XL/ LU-202XLm <sup>*1</sup>	MB-506 <sup>*2</sup>	Main body	-
4		No paper feed option	Main body	-

<sup>\*1</sup> HT-503 can be connected arbitrarily to LU-202m, LU-202XL and LU-202XLm.

<sup>\*2</sup> MK-740/740m (paper feed side) can be connected arbitrarily to MB-506.

### FINISHER CONFIGURATIONS

Config Number			Electrical Requirements
1	Main Body	OT-510 <sup>*2*3</sup>	-
2	Main Body	OT-511 <sup>*2</sup>	-
3	Main Body	FS-531 <sup>*1*2</sup>	-
4	Main Body	FS-612 <sup>*1*2</sup>	-

<sup>\*1</sup> PK-512, 513 and PI-502 can be connected arbitrarily to FS-531 and FS-612.

<sup>\*2</sup> MK-740 (paper exit side) can be connected arbitrarily to FS-531, FS-612, OT-510 and OT-511.


<sup>\*3</sup> MK-740m is only for the option OT-510 (WY2 or later).



**Specification & Installation Guide**  
**AccurioPress C3080/C3080P/C3070**  
**AccurioPrint C3070L**

<b>System Specifications</b>	
<b>Standard Upper Paper Tray</b>	<b>Standard</b>
Capacity	500 sheets
Paper Weight	62 – 216 gsm (256 gsm) 256 gsm – Only A4 or 8.5" x 11" or larger. For paper size A4 or smaller than 8.5" x 11", up to 216 gsm.
Media Size	A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, B5S, ISOB5S, A5S, 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5" S, 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	140 x 182 mm
Max.	330 x 432 mm
<b>Standard Lower Paper Tray</b>	<b>Standard</b>
Capacity	1,000 sheets
Paper Weight	62 – 216 gsm (256 gsm) 256 gsm – Only A4 or 8.5" x 11" or larger. For paper size A4 or smaller than 8.5" x 11", up to 216 gsm.
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, B5S, ISOB5S, A5S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5" S, 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	140 x 182 mm
Max.	330 x 487 mm
<b>Automatic Duplex</b>	<b>Standard</b>
Product Name	ADU
Type	Automatic duplex unit included in the main body
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Weight	62 – 350 gsm
Tray Capacity	Endless
<b>OC-511 – Original Cover</b>	<b>Option</b>
Product Name	OC-511
Description	Simple cover for the platen glass
Compatibility	AccurioPress C3080/C3070, AccurioPrint C3070L


*continued*

Accessories	
DF-706 – Dual Scan Document Feeder	Option
	
Product Name	DF-706
Compatibility	AccurioPress C3080/C3070, AccurioPrint C3070L
Tray Capacity	300 sheets
Original Weight Simplex	35 – 210 gsm
Original Weight Duplex	50 – 210 gsm
Detectable Document Size	A3, A4S, A4, B4, B5S, B5, 11" x 17", 8.5" x 14", 8.5" x 11"S, 8.5" x 11", 8.5" x 5.5"S, 8.5" x 5.5"
Min.	100 x 140 mm
Max.	297 x 431.8 mm
Feeding Speed	Scan (Resolution 200 dpi, 300 dpi) Color: Simplex 120 ipm, Duplex 240 ipm Monochrome: Simplex 120 ipm, Duplex 240 ipm Scan (Resolution 400 dpi, 600 dpi) Color : Simplex 75 ipm, Duplex 150 ipm Monochrome : Simplex 80 ipm, Duplex 160 ipm
Double-feed detection	Yes
Mixed Originals	Yes
Dimensions (WxDxH)	24.31" x 22.63" x 7.06"
Weight	33.31 lb (15.1 kg)
Power Source	From main body


WT-511 – Working Table	Option
Product Name	WT-511
Description	Working table
Compatibility	Not compatible with PF-707m or PF-602m


EF-103 – Envelope Fuser	Option
Product Name	EF-103
Description	Envelope fuser (1/1 speed ratio)
Compatibility	AccurioPress C3080, C3080P, C3070, AccurioPrint C3070L
Feeding Basis	Center
Feeding Modes	Only simplex and restricted to face-up output
Envelope Weight	70 – 100 gsm
Envelope Size Max.	245 – 375 mm
Envelope Size Min.	100 – 148 mm
Dimension (WxDxH)	7.87" x 27.17" x 9.25"
Weight	35.2 lb (16 kg)
Power Source	From main body


<b>Accessories</b>	
<b>MB-506 - Manual Bypass</b>	<b>Option</b>
Products Name	MB-506
Type	Manual bypass tray
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5" S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm Up to 1300 mm with MK-740/MK-740m
Media Type	Plain, Colored, Fine, Color, Coated, Label, Tab Paper, OHP sheet, Envelope, Banner paper, Textured
Media Weight	62 – 350 gsm
Tray Capacity	250 sheets
Dimension (WxDxH)	19.09" x 19.8" x 12.87"
Weight	Approximately 9.26 lb (4.2 kg)
Power Source	From main body
Power Consumption	Less than 28 W
Remark	Not compatible with PF-602m or PF-707

Accessories	
MB-508 - Manual Bypass	Option
Products Name	MB-508
	
Type	Manual bypass tray
Compatibility	AccurioPress C3080/C3080P/C3070
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5" S, 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm Up to 1300 mm with MK-740/MK-740m
Media Type	Plain, Colored, Fine, Color, Coated, Tab Paper, Envelope, Banner paper, Textured
Media Weight	62 – 300 gsm
Tray Capacity	250 sheets
Dimension (WxDxH)	11.65" x 25" x 31"
Weight	Approximately 69.45 lb (31.5 kg)
Power Source	From main body
Power Consumption	Less than 200 W

Accessories	
MK-740/MK-740m - Banner Tray	Option
Product Name	MK-740/MK-740m
Type	Extended Paper Feeding tray Extended Paper Exit tray
Compatibility	Compatible paper feed: MB-506/MB-508 Compatible finishers: Main Tray output - OT-510/ FS-532 Sub Tray output - OT-511//FS-612/FS-531/
Function	Banner printing
Input Capacity	Coated paper: 1 sheet Others: 10 sheets
Output Capacity	RU-518: 10 sheets FS-532: MK-740 - 300 sheets, MK-740m - 1000 sheets (128 gsm up to 762mm) OT-510: MK-740 - 300 sheets, MK-740m - 1000 sheets (128 gsm up to 762mm)
Paper output	Face-up and Straight mode, not Offset and Staple.
Paper weights	128 – 256 gsm
Media Size	Max. 330.2 x 1,300 mm
Dimension (WxDxH)	Paper Feeding tray Closed: 17" (W) x 14.49" (D) x 7.87" (H) Extended: 22.95" (W) x 14.49" (D) x 12.17" (H) Paper Exit tray Closed: 20.79" (W) x 13.62" (D) x 1.12" (H) Extended: 41.49" (W) x 13.62" (D) x 1.12" (H)
Weight	Extended Paper Feeding tray: 2 lb (0.9 kg) MK-740 Extended Paper Exit tray: 4 lb (1.8 kg) MK-740m Extended Paper Exit tray: 17.64 lb (8 kg)
Power Source	None


Accessories	
LU-202m - Large Capacity Cassette	Option
Product Name	LU-202m
	
Type	Large capacity tray
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8K, 16K, Envelopes (Max. 292 x 429 mm, Min. 90 x 148 mm) Tab paper (A4, 8.5" x 11")
Min.	210 x 182 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Coated, Colored, Color, Tab Paper, Textured, Envelope (with MK-746)
Media Weight	62 – 300 gsm
Tray Capacity	2,500 sheets (80 gsm)
Dimension (WxDxH)	27.95" x 25.16" x 18.78"
Weight	92.59 lb (42 kg)
Power Source	From main body
Power Consumption	50 W or less (excl. HT-503)

Accessories	
LU-202XL - Large Capacity Cassette	Option
Product Name	LU-202XL
	
Type	Large capacity tray for Banner
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L LU-202XL can only be attached to main engine, not compatible with PF-707m
Media Size	SRA3, SRA4, A3, A4, B4, B5, SRA4S, A4S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8K, 16, ISOB4 Tab paper (A4, 8.5" x 11") Envelope with MK-746 and EF-103 (Maximum 292 x 429 mm, Minimum 90 x 148 mm)
Min.	210 x 182 mm
Max.	330 x 762 mm
Media Type	Plain, Fine, Coated, Colored, Color, Tab Paper, Envelope, Textured
Media Weight	62 – 300 gsm
Tray Capacity	2,500 sheets (up to 19.5") 1,000 sheets (longer than 19.5") 500 coated sheets (longer than 19.5")
Dimension (WxDxH)	39.84" x 25.16" x 18.78"
Weight	Approximately 132.28 lb (60 kg)
Power Source	From main body
Power Consumption	40W or less (excl. HT-503)
Options	Envelope KIT MK-746, HT-503


Accessories	
LU-202XLm – Large Capacity Cassette	Option
Product Name	LU-202XLm
	
Type	Large capacity tray for Banner
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
Media Size	SRA3, SRA4, A3, A4, B4, B5, SRA4S, A4S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8K, 16, ISOB4 Tab paper (A4, 8.5" x 11") Envelope with MK-746 and EF-103 (Maximum 292 x 429 mm, Minimum 90 x 148 mm)
Min.	210 x 182 mm
Max.	330 x 762 mm
Media Type	Plain, Fine, Coated, Colored, Color, Tab Paper, Envelope, Textured
Media Weight	62 – 300 gsm
Tray Capacity	2,500 sheets (up to 19.5") 1,000 sheets (longer than 19.5") 500 coated sheets (longer than 19.5")
Dimension (WxDxH)	39.84" x 25.16" x 18.78"
Weight	Approximately 132.28 lb (60 kg)
Power Source	From main body
Power Consumption	40W or less (excl. HT-503)
Options	Envelope KIT MK-746, HT-503, HT-515

HT-503/HT-515 – Heating Unit	Option
Product Name	HT-503/HT-515
Type	Fan heater type dehumidifier
Compatibility	LU-202m, LU-202XL: HT-503 only LU-202XLm: Requires HT-515 when LU-202XLm is attached to PF-707m HT-503 or HT-515 can be used when LU-202XLm is connected to main engine
Dimension (WxDxH)	Dehumidifier fan heater unit: 11.54" x 3.23" x 7.76" Power source unit: 4.76" x 3.15" x 6.3"
Weight	Dehumidifier fan heater unit: 3.31 lb (1.5 kg) Power supply unit: 1.98 lb (0.9 kg)
Power Source	HT-503: (supplied from main engine) HT-515: (requires own electrical outlet)
Power Consumption	290 W or less




Accessories	
PF-602m – Paper Feed Unit	Option
Product Name	PF-602m
	
Type	2 Tray Large Capacity Paper Feeding Unit
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Upper tray</b>	
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, B5S, ISOB5S, A5S, B6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5" S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 182 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Coated, Color, Tab Paper
Media Weight	64 – 256 gsm
Tray Capacity	3,000 sheets
<b>Lower tray</b>	
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5,A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5" S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Coated, Color, Tab Paper
Media Weight	62 – 300 gsm
Tray Capacity	3,000 sheets
Option	HT-504 (Heating unit)
Dimension (WxDxH)	37.28" x 29.53" x 41.14"
Weight	Approximately 374.78 lb (171 kg)
Power Source	From main body
Power Consumption	Less than 100 W (without HT-504)

Accessories	
HT-504 - Dehumidifier Heater	Option
Product Name	HT-504
Type	Fan heater type dehumidifier
Compatibility	PF-602m
Function	2 Dehumidifier fan heater unit 1 Heater AC drive unit (AC supply switch) AC-power cord with inlet connector type
Dimension (WxDxH)	Dehumidifier fan heater unit: 7.76" x 3.23" x 11.54" AC-drive unit: 4.76" x 3.15" x 6.3"
Weight	Dehumidifier fan heater unit: Approximately 3.31 lb (1.5 kg) AC-drive unit: Approximately 1.98 lb (0.9 kg)
Power Source	Requires own electrical outlet (5-15R)
Power Consumption	580 W or less


Accessories	
PF-707m – Paper Feed Unit	Option
Product Name	PF-707m
	
Type	Paper feed unit
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Upper tray</b>	
Capacity	1,390 sheets
Paper Weight	62 – 350 gsm
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5", 5.5" x 8.5"S, 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color, Coated
<b>Middle tray</b>	
Capacity	1,390 sheets
Paper Weight	62 – 350 gsm
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5", 5.5" x 8.5"S, 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color, Coated
<b>Lower tray</b>	
Capacity	1,850 sheets
Paper Weight	62 – 350 gsm
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5", 5.5" x 8.5"S, 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color, Coated, Envelope, Textured


<b>Accessories</b>	
<b>PF-707 – Paper Feed Unit</b> <small>continued</small>	<b>Option</b>
Dimension (WxDxH)	39.21" x 30.39" x 40.87"
Weight	Approximately 447.4 lb (203 kg)
Power Source	Requires own electrical outlet (5-15R)
Power Consumption	Less than 580 W
<b>HT-506 – Heating Unit</b>	<b>Option</b>
Product Name	HT-506
Type	Heating unit for Paper feed units Includes 3 heater for each tray
Compatibility	PF-707
Dimension (WxDxH)	Dehumidifier fan heater unit and supply/exhaust air duct: 11.5" x 13.2" x 6.9"
Weight	Approximately 13.2 lb (6 kg)
Power Source	Requires own electrical outlet (5-15R)
Power Consumption	384 W or less








## Accessories

RU-518 – Relay Unit	Option
Product Name	RU-518
	
Type	Relay conveyance unit with paper decurling functionality and banner output tray
De-Curling	Mechanical zigzag decurling
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 7.25" x 10.5", 7.25" x 10.5"S, 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	95 x 139 mm
Max.	330.2 x 1300 mm
Media Type	Same as main body
Media Weight	52 – 350 gsm
Image stabilization	Equipped with density control sensor
Option	HM-103 (Humidification unit)
Dimension (WxDxH)	16.14" x 30.99" x 44.68"
Weight	Approximately 210.32 lb (95.4 kg)
Power Source	Own electrical outlet (5-20R)
Power Consumption	600 W or less


HM-103 – Humidification Unit	Option for RU-518
Product Name	HM-103
Function	Paper humidifier kit
Compatibility	RU-518
Media Size	Same as RU-518
Media Type	Same as main body
Media Weight	62 –350 gsm. Excluding coated paper of 135 gsm or less
Dimension (WxDxH)	Not determined (Built in to RU-518)
Weight	Approximately 45.41 lb (20.6 kg)
Power Source	From RU-518
Power Consumption	150 W or less


Accessories	
IQ-501 – Intelligent Quality Optimizer	Option
Product Name	IQ-501
	
Function	<p>Inline, closed loop quality management unit</p> <p>1 path double-sided reading In-line scanner + Spectrophotometer</p> <p>In-line scanner 1: Read lower side</p> <p>In-line scanner 2: Read upper side</p> <p>Spectrophotometer: Color measure upper side (Spectrum reflectance)</p> <p>In-line scanner 2 + Spectrophotometer</p>
Media Size	
Min.	100 x 139.7 mm
Max.	331 x 488 mm
Media Weight	62 – 350 gsm
Dimension (W x D x H)	26.13" x 27.37" x 40.13"
Weight	Approximately 405.63 lb (184 kg)
Power Source	Own power supply (5-20R)
Power Consumption	700 W or less


Accessories	
GP-501 – Multi (GBC) Punching Unit	Option
Product Name	GP-501
	
Type	GBC puncher
Modes	Bypass mode, Punch mode
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Bypass Mode</b>	
Media Size	Min.: 100 – 148 mm Max.: 330 – 487 mm
Media Weight	62 – 300 gsm
<b>Punch Mode</b>	
Media Size	8.5" x 11"
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	Plain: 75 – 216 gsm Other: 120 – 216 gsm
Punch Precision	Hole size: ± 2% or less Position: ± 0.5 mm or less Burr: ± 0.3 mm or less
Power performance	Offset: ± 2 mm or less Speed change: -30 ms or less Punch trash capacity 2,500 cycle
<b>Other Specifications</b>	
Options	DS-501/DS-507
Dimension (W x D x H)	12" x 30.51" x 40.16"
Weight	Approximately 176.37 lb (80 kg)
Power Source	Own power supply (5-15R)
Power Consumption	Less than 500 W

Accessories		
DIE Set Model		
DS-501	Ring Binder 3-hole, 5/16" diameter	
DS-502	Plastic Bind Cerlox Standard 19-hole	
DS-503	Wire Bind – 3:1 32-hole	
DS-504	WireBind – 2:1 21-hole	
DS-505	Color Coil – 4:1 44-hole	
DS-506	VeloBind – 1:1 Round 11-hole	
DS-507	ProClick LTR 32-Hole	



Accessories	
RU-510 – Relay Unit	Option
Product Name	RU-510
	
Type	Paper conveyance unit with paper reverse functions
Modes	Bypass mode, Reverse mode
Compatibility	Required for GP-501
<b>Bypass Mode</b>	
Media Size	Min.: 100 – 148 mm Max.: 324 – 463 mm
Media Weight	62 – 350 gsm
<b>Reverse Mode</b>	
Media Size	8.5" x 11"
Media Weight	Plain: 75 – 216 gsm Other: 120 – 216 gsm
<b>Other Specifications</b>	
Dimension (WxDxH)	16.14" x 30.51" x 40.16"
Weight	Approximately 77.16 lb (35 kg)
Power Source	From main body
Power Consumption	79VA or less

Accessories	
GP-502 Auto Ring Binder	Option
Product Name	GP-502
	
Type	Auto Ring Binder
Modes	Bypass mode, Binding mode
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Bypass Mode</b>	
Media Size	Min.: 100 – 148 mm Max.: 324 – 483 mm
Media Weight	62 – 350 gsm
<b>Binding Mode</b>	
Media Size	A4, 8.5" x 11", A4 Tab, 8.5" x 11" Tab
Media Type	Plain, Fine, Coated, Tab paper
Media Weight	Content pages: 75 – 120 gsm Cover pages: 163 – 216 gsm Inserts: 75 – 120 gsm
Numbers of sheets per book	From 7 to 102 sheets (75 gsm); up to 96 sheets (80 gsm)
Bound book capacity	Main text: 75 gsm, Cover sheet: 216 gsm 7 sheets booklet: 30 books or less 20 sheets booklet: 25 books or less 102 sheets booklet: 8 books or less
<b>Other Specifications</b>	
Options	RB-101 (GBC Ellipse binding elements) Colors: Black, Navy Blue, White, Clear
Dimension (W x D x H)	25.70" x 37.10" x 41.30"
Weight	Approximately 425 lb (193 kg)
Power Source	Own power supply (5-15R)
Power Consumption	190W or less

Accessories	
GBC PUNCH G2 - Multi (GBC) Punching Unit	Option
Product Name	GBC PUNCH G2
	
Type	GBC puncher
Modes	Bypass mode, Punch mode
<b>Bypass Mode</b>	
Media Size	Min.: 100 – 139.7 mm Max.: 330.2 – 487.7 mm
Media Weight	52 – 350 gsm
<b>Punch Mode</b>	
Media Size	LTR LEF, LTR SEF, LTR SEF Double Punch Statement LEF Legal SEF Ledger SEF, Ledger SEF Double Punch A4 LE, A4 SEF, A4 SEF Double Punch A5 LEF A3 SEF, A3 SEF Double Punch Tab Stock – LTR, with 3,4,5,8 and 10 tabs Statement, with 3 and 5 tabs A4, with 5 and 10 tabs A5, with 3 and 5 tabs
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	Plain: 75 – 300 gsm Coated: 120 – 300 gsm
Punch Precision	Hole size: ± 2% or less Position: ± 0.5 mm or less
Output Performance	Delivery Registration: ± 2 mm or less Delivery Speed Variance: ± 2% Punch trash capacity approximately 20,000 cycles
<b>Other Specifications</b>	
Options	GBC Die Sets - see next page
Dimension (W x D x H)	17.5" x 30.5" x 40.2"
Weight	Approximately 210 lb (123 kg)
Power Source	Own power supply (5-15R)
Power Consumption	440 W

**Accessories**

**GBC Die Sets**

2/4 Hole Die – 8mm

3 Hole Die – 8mm

3 Hole Die – 8mm HD

3/5/7 Hole Die – 8mm

CombBind Die – 19H

CombBind Die – 19/21H HD

Oval Coil Die – 43/44H

Round Coil Die – 43/44H

Round Coil Die – 44/47H HD


Round Wire Die 2:1 – 32H

Round Wire Die 3:1 – 21H


Square Wire Die 2:1


Square Wire Die 3:1

VeloBind 11 Hole Die – Ltr

Accessories	
FD-503 – Punching and Folding Unit	Option
Product Name	FD-503
	
Type	Multi folding device with Punch and Post Inserter functions
Modes	Straight mode, Punch mode, Fold mode, PI mode, Sub tray mode
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Straight Mode</b>	
Function	Exit to main tray without process
<b>Media Size</b>	
Min.	100 x 148 mm (139 with post insertion)
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	2,500 sheets: A4, A4S, B5, B5S, ISOB5, ISOB5S 1,500 sheets: A3, B4, SRA3, SRA4, SRA4S, ISOB4 500 sheets: A5, A5S, B6S
<b>Punch Mode</b>	
Function	Exit to main tray after punching process
<b>Media Size</b>	
2 holes	12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13" 8K, 16K, 16KS, Tab paper (A4, 8.5" x 11")
3 holes	12" x 18", 11" x 17", 9" x 11", 8.5" x 11", 8K, 16K, Tab paper (A4, 8.5" x 11")
<b>Media Type</b>	
Media Weight	62 – 216 gsm
Hole Pitch	70 mm (2 holes), 108 mm (3 holes)
<b>Fold Mode</b>	
Function	Exit to main tray after folding process
Type 1	Center fold/letter-fold-in/letter-fold-out/Z-fold
Type 2	Double-parallel fold/gate fold
<b>Media Size</b>	
Min.	210 x 279 mm
Max.	305 x 458 mm

Accessories	
FD-503 – Punching and Folding Unit <small>continued</small>	Option
<b>Media Type</b>	Plain, Fine, Color Specific, Coated
Media Weight	Center fold, letter-fold-in/letter-fold-out/Z-Fold: 62 gsm to 130 gsm Double Parallel/Gatefold: 62 gsm to 91 gsm
<b>PI Mode</b>	
Function	Feed cover paper/paper to be inserted
<b>Media Size</b>	
Min.	182 x 140 mm
Max.	330 x 483 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	50 – 300 gsm
Tray Capacity	2 x 500 sheets
<b>Sub Tray Mode</b>	
Function	Exit to sub tray without process
Media Size	A3, B4, A4, A4S, B5, B5S, A5, A5S, B6S, A6S, Postcard-S, SRA3, SRA4, SRA4S, ISOB5, ISOB5S, ISOB4, Free paper, Wide paper, Standard Tab paper
Min.	100 x 148 mm (139 with post insertion)
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 300 gsm
Tray Capacity	200 sheets
<b>Other Specifications</b>	
Dimension (WxDxH)	15.75" x 28.5" x 48.5"
Weight	Approximately 285.5 lb (130 kg)
Power Source	Requires own electrical outlet (5-20R)
Power Consumption	180 W


Accessories	
LS-506 - Stacking Unit	Option
Product Name	LS-506
	
Type	Large capacity stacker of horizontal stacking with gripper conveyance
Modes	Straight mode, Offset mode, Sub tray mode
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Stacker Mode</b>	
Function	Exit to stacker without finishing
Media Size	SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, B5, ISOB5, A5, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, Tab paper (A4, 8.5" x 11")
Min.	148 x 219 mm
Max.	210 x 483 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm (via Post insertion down to 50 gsm)
Tray Capacity (80 gsm)	5,000 sheets: Paper which the length in the sub scan direction is 195 mm to 488 mm, SRA3, A3, B4, ISOB4, SRA4, SRA4S, A4, A4S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K 2,000 sheets: Paper which the length in the sub scan direction is 148 mm to 194 mm, B5, ISOB5, A5
<b>Sub Tray Mode</b>	
Function	Exit to sub tray without finishing
<b>Media Size</b>	
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Type	All engine supported
Media Weight	62 – 300 gsm (via Post insertion down to 50 gsm)
Tray Capacity	200 sheets (Z-Fold: 20 sheets, Center-fold: 40 sheets)
<b>Other Specifications</b>	
Dimension (WxDxH)	30" x 28.5" x 48.5"
Weight	Approximately 242.5 lb (110 kg)
Power Source	From main body
Power Consumption	143 W

Accessories																												
SD-506 – Saddle Stitch Unit	Option																											
Product Name	SD-506																											
																												
Type	Saddle stitch unit																											
Modes	Saddle stitch mode, Trimming mode, Multi sheet half-fold mode, Multi sheet letter fold-In mode, Sub tray mode																											
Compatibility	AccurioPress C3080/C3080P/C3070																											
Saddle Stitch Mode																												
Function	Exit to saddle stitch tray after fold & stitch process																											
Media Size	SRA3, A3, JISB4, ISOB4, SRA4S, A4S, B5S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16KS																											
Min.	182 x 257 mm																											
Max.	324 x 463 mm																											
Media Type	Plain, Fine, Color Specific, Coated																											
Media Weight	62 – 244 gsm (via Post insertion down to 50 gsm)																											
Staple Position	Changeable (90 – 165 mm)																											
Staple Page	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="3" style="background-color: #D3D3D3;">SD-506 – Number of Stapled Sheets Based on Paper Weight*</th> </tr> <tr> <th style="background-color: #D3D3D3;">Paper Weight</th> <th style="background-color: #D3D3D3;">Plain</th> <th style="background-color: #D3D3D3;">Coated Color Specific</th> </tr> </thead> <tbody> <tr> <td style="background-color: #D3D3D3;">62 – 80</td> <td style="text-align: center;">50</td> <td style="text-align: center;">30</td> </tr> <tr> <td style="background-color: #D3D3D3;">81 – 91</td> <td style="text-align: center;">30</td> <td style="text-align: center;">15</td> </tr> <tr> <td style="background-color: #D3D3D3;">92 -135</td> <td style="text-align: center;">20</td> <td style="text-align: center;">10</td> </tr> <tr> <td style="background-color: #D3D3D3;">136-176</td> <td style="text-align: center;">10</td> <td style="text-align: center;">5</td> </tr> <tr> <td style="background-color: #D3D3D3;">177-256</td> <td style="text-align: center;">5</td> <td style="text-align: center;">—</td> </tr> <tr> <td style="background-color: #D3D3D3;">257-300</td> <td style="text-align: center;">—</td> <td style="text-align: center;">—</td> </tr> <tr> <td style="background-color: #D3D3D3;">301-350</td> <td style="text-align: center;">—</td> <td style="text-align: center;">—</td> </tr> </tbody> </table> <p style="font-size: small; margin-top: 5px;">*1 sheet can be switched to thick paper (200 gsm)</p>	SD-506 – Number of Stapled Sheets Based on Paper Weight*			Paper Weight	Plain	Coated Color Specific	62 – 80	50	30	81 – 91	30	15	92 -135	20	10	136-176	10	5	177-256	5	—	257-300	—	—	301-350	—	—
SD-506 – Number of Stapled Sheets Based on Paper Weight*																												
Paper Weight	Plain	Coated Color Specific																										
62 – 80	50	30																										
81 – 91	30	15																										
92 -135	20	10																										
136-176	10	5																										
177-256	5	—																										
257-300	—	—																										
301-350	—	—																										
Tray Capacity	2 – 10 stapled sheets: 50 sets or more 11 – 20 stapled sheets: 30 sets or more 21 – 30 stapled sheets: 20 sets or more 31 – 40 stapled sheets: 20 sets or more 41 – 50 stapled sheets: 15 sets or more																											



Accessories	
SD-506 – Saddle Stitch Unit <small>continued</small>	Option
<b>Trimming Mode</b>	
Function	Exit to saddle stitch tray after trimming
Media Size	Conforms to the saddle stitching mode specification
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 300 gsm (via Post insertion down to 50 gsm)
Max sheets for trim	50 sheets (80 gsm) x 2 = 100 sheets 49 sheets (80 gsm) + 1 sheet (200 gsm) x 2 = 100 sheets
Trim position	1 edge (opposite to saddle)
<b>Multi Sheet Half Fold Mode</b>	
Function	Exit to saddle stitch tray after folding 1 or more sheets
Media Size	SRA3, A3, JISB4, ISOB4, SRA4S, A4S, B5S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16KS
Min.	182 x 257 mm
Max.	324 x 463 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 244 gsm (via Post insertion down to 50 gsm)
Max. multiple sheets	50 – 81 gsm: 5 sheets 82 – 130 gsm: 3 sheets 131 – 244 gsm: 2 sheets
Tray Capacity	30 sets
<b>Multi Sheet Letter Fold-In Mode</b>	
Function	Exit to 3-fold tray after 3-folding 1 or more sheets
Media Size	A4S, 8.5" x 11"S
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 91 gsm (via Post insertion down to 50 gsm)
Max. multiple sheets	50 – 91 gsm: 5 sheets 82 – 91 gsm: 3 sheets
Tray Capacity	20 sets
<b>Sub Tray Mode</b>	
Function	Exit to sub tray without process
Media Size	SRA3, A3, ISOB4, SRA4, SRA4S, A4, A4S, ISOB5, ISOB5S, A5, A5S, B6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 483 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	200 sheets (Z-fold: 20 sheets/Center fold: 40 sheets)

Accessories	
SD-506 – Saddle Stitch Unit <small>continued</small>	Option
<b>Other Specifications</b>	
Dimension (WxDxH)	46" x 30.5" x 40.25" – Saddle stitch tray stored (pulled out: 56.73")
Weight	Approximately 617.25 lb (280 kg)
Power Source	Requires own electrical outlet (5-20R)
Power Consumption	270 W

Accessories	
SD-513 – Saddle Stitch Unit	Option
Product Name	SD-513
	
Type	Saddle stitch unit
Modes	Saddle stitching mode Saddle stitching trimming mode Multi half-fold mode Multi half-fold trimming mode Multi tri-folding mode Straight mode Sub tray mode
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Saddle Stitch Mode</b>	
Function	Exit to saddle stitch tray after fold & stitch process
Media Size	SRA3, A3, B4, ISOB4, SRA4S, A4S, B5S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16KS
Min.	120 x 257 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	50 – 300 gsm
Staple page	See charts below
Staple position	At position of ½ of paper length (default) Adjustable up to +/- 20 mm by user (Media Sizes within 165 – 296 mm)
4-point staple	A3, 11" x 17" Custom size (Max. 297 x 483 mm, Min. 279 x 257 mm)
Tray Capacity	2 – 10 stapled sheets: 30 sets or more

Accessories													
SD-513 – Saddle Stitch Unit <small>continued</small>	Option												
<b>Trimming Mode</b>													
Function	Front trim of booklet												
Media Size	SRA3, A3, B4, ISOB4, SRA4S, A4S, B5S, ISOB5S Wide paper, Custom size paper												
Min.	120 x 257 mm												
Max.	330 x 487 mm												
Media Type	Plain, Fine, Color Specific, Coated												
Media Weight	50 – 300 gsm												
Max sheets for trim	35 sheets (80 gsm) x 2 = 70 sheets												
Trim length	5 – 40 mm (booklet length more than 120 mm)												
Trim position	Fore edge (opposite of stitching)												
<b>Multi Sheet Half Fold Mode</b>													
Function	Exit to saddle stitch tray after folding 1 or more sheets												
Media Size	Same specification as saddle stitching mode												
Media Type	Plain, Fine, Color Specific, Coated												
Media Weight	62 – 300 gsm												
Max. multiple sheets	50 – 81 gsm: 5 sheets 82 – 130 gsm: 3 sheets 131 – 300 gsm: 2 sheets												
Tray Capacity	30 sets (5 sheets)												
<b>Multi Sheet Letter Fold-In Mode</b>													
Function	Exit to 3-fold tray after 3-folding 1 or more sheets												
Media Size	A4S, 8.5" x 11"S												
Media Type	Plain, Fine, Color Specific, Coated												
Media Weight	62 – 91 gsm												
Max. multiple sheets	50 – 81 gsm: 5 sheets 82 – 91 gsm: 3 sheets With CR-101 80-216 gsm: 1 sheet												
Tray Capacity	<table border="1"> <thead> <tr> <th>Folding Sheets</th> <th>Number of Sets</th> </tr> </thead> <tbody> <tr> <td>1 sheet folding</td> <td>40 sets</td> </tr> <tr> <td>2 sheets folding</td> <td>20 sets</td> </tr> <tr> <td>3 sheets folding</td> <td>13 sets</td> </tr> <tr> <td>4 sheets folding</td> <td>10 sets</td> </tr> <tr> <td>5 sheets folding</td> <td>8 sets</td> </tr> </tbody> </table>	Folding Sheets	Number of Sets	1 sheet folding	40 sets	2 sheets folding	20 sets	3 sheets folding	13 sets	4 sheets folding	10 sets	5 sheets folding	8 sets
Folding Sheets	Number of Sets												
1 sheet folding	40 sets												
2 sheets folding	20 sets												
3 sheets folding	13 sets												
4 sheets folding	10 sets												
5 sheets folding	8 sets												

Accessories																																								
SD-513 – Saddle Stitch Unit <small>continued</small>		Option																																						
<b>Sub Tray Mode</b>																																								
	Function	Exit to sub tray without process																																						
	Media Size	SRA3, A3, B4, ISOB4, SRA4S, SRA4, A4, A4S, B5, ISOB5, ISOB5S, B5S, A5, A5S, B6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5", 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")																																						
	Min.	100 x 148 mm																																						
	Max.	330 x 487 mm																																						
	Media Type	Plain, Fine, Color Specific, Coated																																						
	Media Weight	40 – 350 gsm																																						
	Tray Capacity	200 sheets Z-fold: 20 sheets/Center fold: 20 sheets Creasing: 100 sheets (300 gsm or less)/50 sheets (301 gsm or more)																																						
<b>Other Specifications</b>																																								
	Dimension (WxDxH)	48.86" x 56.34" x 1.020" Width with booklet tray 40.16"																																						
	Weight	Approximately 742.96 lb (337 kg)																																						
	Power Source	Requires own electrical outlet (5-20R)																																						
	Power Consumption	Less than 350 W																																						
	Max No. of Sheets: Fold & Staple/Trim*	<table border="1"> <thead> <tr> <th>C3070 Series</th> <th>Normal Paper</th> <th>Fine Paper</th> <th>Coated Paper Color Paper</th> </tr> </thead> <tbody> <tr> <td>62 – 80</td> <td>35</td> <td>35</td> <td>30</td> </tr> <tr> <td>81 – 91</td> <td>30</td> <td>30</td> <td>15</td> </tr> <tr> <td>92 – 135</td> <td>20</td> <td>20</td> <td>10</td> </tr> <tr> <td>136 – 176</td> <td>15</td> <td>15</td> <td>5</td> </tr> <tr> <td>177 – 216</td> <td>10</td> <td>10</td> <td>NO</td> </tr> <tr> <td>217 – 256</td> <td>5</td> <td>5</td> <td>NO</td> </tr> <tr> <td>257 – 300</td> <td>3</td> <td>3</td> <td>NO</td> </tr> <tr> <td>NO</td> <td>NO</td> <td>NO</td> <td>NO</td> </tr> </tbody> </table>	C3070 Series	Normal Paper	Fine Paper	Coated Paper Color Paper	62 – 80	35	35	30	81 – 91	30	30	15	92 – 135	20	20	10	136 – 176	15	15	5	177 – 216	10	10	NO	217 – 256	5	5	NO	257 – 300	3	3	NO	NO	NO	NO	NO	<p>* When paper weight included within one copy of finished booklet vary, the heaviest one is applicable.</p>	
C3070 Series	Normal Paper	Fine Paper	Coated Paper Color Paper																																					
62 – 80	35	35	30																																					
81 – 91	30	30	15																																					
92 – 135	20	20	10																																					
136 – 176	15	15	5																																					
177 – 216	10	10	NO																																					
217 – 256	5	5	NO																																					
257 – 300	3	3	NO																																					
NO	NO	NO	NO																																					
	Max No. of Sheet: Fold & Staple/Trim with 200 gsm cover	<table border="1"> <thead> <tr> <th>C3070 Series</th> <th>Normal Paper</th> <th>Fine Paper</th> <th>Coated Paper Color Paper</th> </tr> </thead> <tbody> <tr> <td>62 – 80</td> <td>30+1</td> <td>30+1</td> <td>29+1</td> </tr> <tr> <td>81 – 91</td> <td>29+1</td> <td>29+1</td> <td>14+1</td> </tr> <tr> <td>92 – 135</td> <td>19+1</td> <td>19+1</td> <td>9+1</td> </tr> <tr> <td>136 – 176</td> <td>14+1</td> <td>14+1</td> <td>4+1</td> </tr> <tr> <td>177 – 216</td> <td>9+1</td> <td>9+1</td> <td>NO</td> </tr> <tr> <td>217 – 256</td> <td>4+1</td> <td>4+1</td> <td>NO</td> </tr> <tr> <td>257 – 300</td> <td>2+1</td> <td>2+1</td> <td>NO</td> </tr> <tr> <td>NO</td> <td>NO</td> <td>NO</td> <td>NO</td> </tr> </tbody> </table>	C3070 Series	Normal Paper	Fine Paper	Coated Paper Color Paper	62 – 80	30+1	30+1	29+1	81 – 91	29+1	29+1	14+1	92 – 135	19+1	19+1	9+1	136 – 176	14+1	14+1	4+1	177 – 216	9+1	9+1	NO	217 – 256	4+1	4+1	NO	257 – 300	2+1	2+1	NO	NO	NO	NO	NO		
C3070 Series	Normal Paper	Fine Paper	Coated Paper Color Paper																																					
62 – 80	30+1	30+1	29+1																																					
81 – 91	29+1	29+1	14+1																																					
92 – 135	19+1	19+1	9+1																																					
136 – 176	14+1	14+1	4+1																																					
177 – 216	9+1	9+1	NO																																					
217 – 256	4+1	4+1	NO																																					
257 – 300	2+1	2+1	NO																																					
NO	NO	NO	NO																																					

**Accessories**


SD-513 – Saddle Stitch Unit <small>continued</small>	Option			
Max No. of Sheets: Fold & Staple/ Trim with Various Cover Weights	<b>C3070 Series</b>	<b>Normal Paper</b>	<b>Fine Paper</b>	<b>Coated Paper Color Paper</b>
	62 – 80	25 + C1/2	25 + C1/2	24 + C1/2
	81 – 91	24 + C2/3	24 + C2/3	9 + C2
	92 – 135	19 + C1 14 + C2	19 + C1 14 + C2	4 + C2
	136 – 176	14 + C1 9 + C2	14 + C1 9 + C2	C3 NO
	177 – 216	9 + C1 4 + C2	9 + C1 4 + C2	NO
	217 – 256	4 + C2 3 + C2	4 + C2 3 + C2	NO
	257 – 300	2 + C1/2	2 + C1/2	NO
	NO	NO	NO	NO

C2: Covers from 217 – 256 gsm  
C3: Covers from 257 – 300 gsm

CR-101 Creasing Unit	Option
Product Name	CR-101
Type	Creasing Unit
Modes	Saddle stitch/Half-fold+Crease Tri-fold + Crease Perfect Binder+Crease Free Crease
Compatibility	SD-513
<b>Creasing Mode</b> (for Saddle Stitch, Perfect Binding & Free Crease)	
Function	Creasing and processing in SD or PB or output of creased sheets 1 sheet is creased at a time Selectable between 1 to 4 creases
Media Size	Conforms to SD-513 specifications
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	80 – 350 gsm* (For Saddle Stitch 300 gsm/For Perfect Binding 216 gsm) *Depends on the function that is combined with creasing
Minimum distance between crease	1 mm
Number of creases	1-4 (limited according to mode)
Dimensions (WxDxH)	8.27" x 18.19" x 5.39" (built in SD-513)
Weight	Approximately 15 lb (6.8 kg)
Power Source	Supplied from SD-513
Power Consumption	25W or less


<b>Accessories</b>	
<b>TU-503 Trimmer Unit</b>	<b>Option</b>
Product Name	TU-503
Type	Trimming Unit
Modes	Slitting (Top and bottom cutting of sheet) and processing in SD or PB or flat output of slit sheets
Compatibility	SD-513
<b>Slitter Mode</b>	
Media Size	Conforms to SD-513 multi-tri-fold mode specifications
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	80 – 300 gsm (depending on mode)
Cut amount	5 to 26 mm top and/or bottom (difference between top and bottom amount ≤10 mm)
Dimensions (WxDxH)	11.97" x 24.8" x 15" (built in SD-513)
Weight	Approximately 41.23 lb (18.7 kg)
Power Source	Supplied from SD-513
Power Consumption	50W or less

<b>FD-504 Square Folding Unit</b>	<b>Option</b>
Product Name	FD-504
Type	Spine Corner Forming Unit
Modes	Spine Corner Forming (flat back) of booklets
Compatibility	SD-513
<b>Spine Corner Forming</b>	
Function	Exit to saddle stitch tray after Spine Corner Forming process
Media Size	Conforms to SD-513 saddle-stitching mode specifications
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 300 gsm
Number of sheets per set	5-35 sheets
Dimensions (WxDxH)	25.31" x 10.16" x 7.76" (built in SD-513)
Weight	Approximately 28.66 lb (13 kg)
Power Source	Supplied from SD-513
Power Consumption	60W or less

Accessories	
<b>PB-503 – Perfect Binding Unit</b>	
Product Name	PB-503
	
Type	In-line perfect binder using hot-melt glue technology and automated cover sheet trimming
Modes	Book binding mode, Sub tray mode
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Perfect Binding Mode</b>	
Function	Binding a book and place on the stacker
<b>Content Pages</b>	
Media Size	A4, JISB5, A5, A5S, 8.5" x 11", 5.5" x 8.5"S, 16K
Min.	139 x 210 mm
Max.	307 x 221 mm
Z-fold	A3, B4, A4S, ISOB4
Media Type	Plain, Fine, Color Specific, Matte Coated
Media Weight	64 – 105 gsm
<b>Cover Pages</b>	
<b>Media Size</b>	
Min.	139 x 279 mm
Max.	307 x 472 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	81 – 216 gsm
No. of sheets for Bookbinding	Min: 10 sheets Max: 300 sheets or 30 mm (Color paper or Matt coat paper: 150 sheets or 15 mm) In case of Z-fold insertions, restrictions apply for number of Z-fold sheets and total number of sheets.
Cover Tray Capacity	1,000 sheet (82 gsm) 500 sheet (216 gsm)
Book Tray Capacity	Max: 30 mm thick books x 11 pc. x 2 rows (about 6,600 sheets) To prevent stacking problems, capacity is limited by book thickness: 10 – 30 sheet booklet: 50 pc. 31 – 150 sheet booklet: 35 pc. or limit detector 151 – 300 sheet booklet: To limit detector
Warm-up time	About 20 Minutes



<b>Accessories</b>	
<b>PB-503 – Perfect Binding Unit</b> continued	
<b>Supply of Glue</b>	
Type	Hot-Melt type
<b>Sub Tray Mode</b>	
Function	Exit paper without treatment on the sub tray.
Media Size	SRA3, A3, JISB4, ISOB4, SRA4, SRA4S, A4, A4S, JISB5, ISOB5, JISB5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 8K, 16K, 16KS, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13" Tab Paper (A4, 8.5" x 11")
Min.	100 x 148 mm (139 with post insertion)
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	200 sheets
<b>Other Specifications</b>	
Dimension (WxDxH)	53.5" x 30.5" x 48.25"
Weight	270 kg
Power Source	Requires own electrical outlet (5-20R)
Power Consumption	Less than 1000 W


Accessories	
FS-532 Staple Finisher with AiO Options	Option
Product Name	FS-532
	
Type	The Finisher with Staple Function and All in One Options
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Straight Exit Mode</b>	
Function	Exit paper without treatment on the main tray
Media Size	SRA3, SRA4, A3, B4, ISOB4, SRA4S, A4, A4S, B5, ISOB5, B5S, A5, ISOB5S, A5S, ISOB6S, B6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 5.5" x 8.5"S, 8K, 16K, 16KS Tab Paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 488 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm (via Post insertion down to 50 gsm)
Tray Capacity	Without SD-510 Printing direction length 320 mm or longer                      2,000 sheets 250 to 319 mm                          4,200 sheets 249 mm or shorter                      750 sheets (Paper weight 72 to 81 gsm)
<b>Off Set Mode</b>	
Function	Exit paper each set copy 15 mm Shift on the main tray.
Media Size	
Min.	100 x 148 mm (139 with Post insertion)
Max.	324 x 483 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	Printing direction length 320 mm or longer                      1,500 sheets 250 to 319 mm                          1,500 sheets 249 mm or shorter                      750 sheets (Paper weight 72 to 81 gsm)

Accessories								
FS-532 Staple Finisher with AiO Options <small>cont.</small>		Option						
<b>Staple Mode</b>								
Function	After staple, exit the paper on the man tray							
Media Size	SRA3, SRA4, A3, B4, ISOB4, SRA4S, A4, A4S, B5, ISOB5, A5, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K Tab Paper (A4, 8.5" x 11")							
Min.	148 x 203 mm							
Max.	324 x 483 mm							
Media Type	Plain, Fine, Color Specific, Coated							
Media Weight	62 – 244 gsm (300 gsm with DIPSW setting, via Post insertion down to 50 gsm)							
Staple Page	<b>FS-532 Staple Capability</b>							
		Number of staple sheets					Plain Paper/ Except Fine	
		Plain		Fine			less than 400 mm	400 mm or more
	Media Weight	less than 400 mm	400 mm or more	320 mm or less	321 to 399 mm	400 mm or more	less than 400 mm	400 mm or more
	40–49 gsm	–	–	–	–	–	–	–
	50–61 gsm	100	50	50	20	–	35	35
	62–74 gsm	100	50	50	20	–	35	35
	75–80 gsm	100	50	30	30	30	35	35
	81–91 gsm	60	50	30	30	30	35	35
	92–135 gsm	50	50	30	30	30	30	30
	136–162 gsm	40	40	30	30	30	25	25
	163–216 gsm	25	25	25	25	25	20	20
217–244 gsm	25	25	25	25	25	15	15	
245–300 gsm	10	10	10	10	10	10	10	
301–350 gsm	–	–	–	–	–	–	–	
Staple position	1 position of parallel staple at front corner 2 position 1 position of 45° staple at rear corner							
Tray Capacity	2 – 9 stapled sheets: 150 sets (paper length max: 364 mm) 75 sets (less than 182 and more than 364 mm)  10 – 20 stapled sheets: 50 sets 21 – 30 stapled sheets: 30 sets 31 – 40 stapled sheets: 25 sets 41 – 50 stapled sheets: 20 sets 51 – 60 stapled sheets: 15 sets 61 – 100 stapled sheets: 10 sets							
<b>Sub Tray Mode</b>								
Function	Exit paper without treatment on the sub tray.							
<b>Media Size</b>								
Min.	100 x 148 mm							
Max.	330 x 487 mm							
Media Type	Plain, Fine, Color Specific, Coated							

Accessories	
FS-532 Staple Finisher with AiO Options <small>cont.</small>	Option
Media Weight	62 – 350 gsm
Tray Capacity	300 sheets
Optional	Punch kit (PK-522) Post inserter (PI-502) Saddle Stitch Unit (SD-510)
Dimension (WxDxH)	21.41" x 28.46" x 42.40" (excl. Main tray) Width incl. Main tray (retracted): 34.49" Width incl. Main tray (extended): 39.49" Height with PI-502: 46.77"
Weight	Approximately 163.14 lb (74 kg)
Power Source	From main body
Power Consumption	144 W or less




## Specification & Installation Guide

AccurioPress C3080/C3080P/C3070  
AccurioPrint C3070L

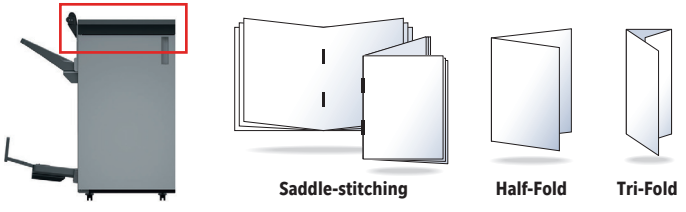
Accessories	
SD-510 Saddle Stitch Unit	Option
Product Name	SD-510
	 <p style="text-align: center;">Saddle-stitching      Half-Fold      Tri-Fold</p>
Type	Optional Saddle Stitch & Fold Unit for FS-532
Compatibility	FS-532
<b>Booklet Mode</b>	
Function	Center fold and saddle stitch, output to paper output tray
Media Size	SRA3, A3, B4, ISOB4, SRA4S, A4S, B5S, ISOB5S, 13" x 19", 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16KS
Min.	120 x 240 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	Content Sheets: 50 – 216 gsm Cover Sheets: 50 – 300 gsm (with limitation on Media Type)
Staple page	50 – 61 gsm: 25 sheets 62 – 80 gsm: 20 sheets 81 – 91 gsm: 16 sheets 92 – 216 gsm: 5 sheets 217 -244 gsm: Cover only 245 – 300 gsm: Cover only  1 sheet of 50 to 216 gsm paper is treated as 1 sheet 1 sheet of more than 217 paper is treated as 5 sheets
Staple position	Adjustable (60 – 148.5 mm)
Tray Capacity	Saddle Stitch 2 to 5 sheets: 35 sets 6 to 10 sheets: 25 sets 11 to 20 sheets: 15 sets 20 to 25 sheets: 15 sets
Main Tray Capacity	With SD-510 Printing direction length 320 mm or longer      2,000 sheets 250 to 319 mm      3,000 sheets 249 mm or shorter      750 sheets (Paper weight 72 to 81 gsm)

<b>Accessories</b>	
<b>SD-510 Saddle Stitch Unit</b> <small>continued</small>	<b>Option</b>
<b>Center Folding Mode</b>	
Function	Center Fold, output on booklet tray
Media Size	SRA3, A3, B4, ISOB4, SRA4S, A4S, B5S, ISOB5S, 13" x 19", 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16KS
Min.	120 x 240 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 216 gsm
Multi-fold capacity	50 – 216 gsm: 1 – 5 sheets 217 – 300 gsm: 1 sheet
Fold Tray Capacity	1 -5 sheets: 35 sets
<b>Letter Fold-In Mode</b>	
Function	Tri-fold, output on paper tray
Media Size	8.5" x 11"
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 105 gsm
Multi-fold capacity	3 sheets (62 – 91 gsm) 1 sheet (92 – 105 gsm)
Fold Tray Capacity	1 sheet: 50 sets 2 sheets: 40 sets 3 sheets: 30 sets
Optional	Punch kit (PK-522) Post inserter (PI-502)
Dimension (WxDxH)	11.06" x 23.50" x 20.87" Installed within FS-532
Weight	Approximately 50 lb (22.6 kg) (excl. output tray) Output Tray: 8.3 lb (3.8 kg)
Power Source	From main body
Power Consumption	40 W or less

Accessories	
PK-522 – Punch Kit	Option
Product Name	PK-522
Function	2/3 hole punching (Selectable)
Compatibility	FS-532
<b>Media Size</b>	
2 holes	A3, B4, SRA4S, A4, A4S, B5, B5S, A5, A5S, ISOB4, ISOB5, ISOB5S, 11" x 17", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 9" x 11", 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS
3 holes	A3, B4, A4, B5, 11" x 17", 8.5" x 11", 9" x 11", 8K, 16K
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 300 gsm
Hole Diameter	2 holes: 6.5 mm/80 mm 3 holes: 6.5 mm/80 mm
Adjustment	± 5.0 mm
Accuracy	0.2 mm
Dimension (W x D x W)	6.14" x 7.13" x 23.31"
Weight	Approximately 9.92 lb (4.5 kg)
Power Source	From main body
Power Consumption	Less than 40 W


Accessories	
PI-502 - Post Inserter	Option
Product Name	PI-502
	   <p style="text-align: center;"> <span>Cover Sheets</span>                      <span>Interleaved Sheets</span> </p>
Type	Cover Paper feeding tray (2 trays)
Compatibility	FS-612, FS-531, FS-532
<b>Upper Tray</b>	
Media Size	A4, A4S, B5, ISOB5, B5S, A5, 9" x 11", 8.5" x 11", 8.5" x 11"S, 16K, 16KS
Min.	182 x 148 mm
Max.	330 x 297 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	50 – 300 gsm
Tray Capacity	200 sheets or 30 mm height
<b>Lower Tray</b>	
Media Size	SRA3, A3, B4, ISOB4, SRA4S, A4, A4S, B5, ISOB5, B5S, A5, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS
Min.	182 x 148 mm
Max.	330 x 482 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	50 – 200 gsm
Tray Capacity	200 sheets or 30 mm height
Dimension (WxDxH)	20.12" x 24.41" x 8.66"
Weight	Approximately 23.15 lb (10.5 kg)
Power Source	From main body
Power Consumption	30 W or less



Accessories					
FS-612 - Booklet Finisher		Option			
Product Name	FS-612				
					
Type	All in one finisher				
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L				
<b>Straight Exit Mode/Off Set Mode</b>					
Function	Exit paper without treatment on the main tray				
Media Size	A4, A4S, B5, ISOB5, B5S, ISOB5S, 9" x 11", 8.5" x 11", 8.5" x 11"S, 16K, 16KS, SRA3, A3, B4, ISOB4, SRA4, SRA4S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, A5, A5S, B6S, ISOB6S, 5.5" x 8.5" S Tab paper (A4, 8.5" x 11")				
Min.	100 x 148 mm				
Max.	330 x 487 mm				
Media Type	Plain, Fine, Color Specific, Coated				
Media Weight	62 – 350 gsm				
Tray Capacity	2,500 sheets: A4, A4S, B5, ISOB5, B5S, ISOB5S, 9" x 11", 8.5" x 11", 8.5" x 11"S, 16K, 16KS 1,500 sheets: SRA3, A3, B4, ISOB4, SRA4, SRA4S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K 500 sheets: A5, A5S, B6S, ISOB6S, 5.5" x 8.5" S				
<b>Staple Mode</b>					
Function	After staple, the paper exits on the main tray				
Media Size	A3, B4, ISOB4, SRA4S, A4, A4S, B5, ISOB5, B5S, A5, 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")				
Min.	182 x 148 mm				
Max.	314 x 458 mm				
Media Type	Plain, Fine, Color, Coated				
Media Weight	62 – 105 gsm				
Staple Page		<b>Plain</b>	<b>Fine</b>	<b>Color</b>	<b>Coated</b>
	80 gsm	50 sheet	50 sheet	30 sheet	30 sheet
	105 gsm	30 sheet	30 sheet	16 sheet	16 sheet
Staple Position	Front 1, Rear 1, Center 2				

Accessories					
FS-612 - Booklet Finisher <small>continued</small>		Option			
Tray Capacity	2 - 9 stapled sheets:	100 sets (paper length max: 417 mm)			
	50 sets (paper length: 418 mm or more)				
	10 - 20 stapled sheets:	50 sets			
	21 - 30 stapled sheets:	30 sets			
	31 - 40 stapled sheets:	25 sets			
41 - 50 stapled sheets:	20 sets				
<b>Booklet Mode</b>					
Function	After center folding, the set paper exits on the booklet tray				
Media Size	A3, B4, A4S, SRA4S, ISO-B4, Free paper, Wide paper				
Min.	210 x 279 mm				
Max.	314 x 458 mm				
Media Type	Plain, Fine, Color Specific, Coated				
Media Weight	62 - 105 gsm				
Staple page		<b>Plain</b>	<b>Fine</b>	<b>Color</b>	<b>Coated</b>
	80 gsm	20 sheet	20 sheet	20 sheet	20 sheet
	105 gsm	20 sheet	20 sheet	16 sheet	16 sheet
Staple position	Adjustable (128 - 160 mm)				
Tray Capacity	20 sets with 5 sheets (15 sets for paper length up to 299 mm)				
<b>Center Folding Mode</b>					
Function	It is possible to multi fold 3 copies, the set paper exits on the booklet tray.				
Media Size	A3, SRA3, B4, ISOB4, SRA4S, A4S, SRA3, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 11"S, 8K				
Min.	210 x 279 mm				
Max.	320 x 458 mm				
Media Type	Plain, Fine, Color Specific, Coated				
Media Weight	62 - 105 gsm				
Multi-fold capacity	Up to 3 sheets				
Fold Tray Capacity	3 sheet fold: 33 sets 25 sets (length up to 299 mm)				
<b>Letter Fold-In Mode</b>					
Function	It is possible to multi fold 3 copies, the set paper exits on the booklet tray.				
Media Size	A4S, 8.5" x 11"S				
Media Type	Plain, Fine, Color Specific, Coated				
Media Weight	62 - 105 gsm				
Multi-fold capacity	3 sheets (60 - 80 gsm)				
	1 sheet (81 - 105 gsm)				
Fold Tray Capacity	1 sheet fold: 50 sets				


Accessories	
FS-612 – Booklet Finisher <small>continued</small>	Option
<b>Sub Tray Mode</b>	
Function	Exit paper without treatment on the sub tray.
Media Size	A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	100 x 148 mm
Max.	330 x 487 mm Banner Paper – 330 x 1200 mm
Media Type	Plain, High Quality, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	Up to 100 sheets
Optional	Punch kit (PK-512) Post inserter (PI-502)
Dimension (WxDxH)	16.69" x 25.83" x 39" (excl. Main tray) Width incl. Main tray (retracted): 26.56" Width incl. Main tray (extended): 31.12"
Weight	Approximately 143.3 lb (65 kg)
Power Source	From main body
Power Consumption	80 W

Accessories	
FS-531 – Staple Finisher	Option
Product Name	FS-531
	
Type	Finisher with staple function
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
<b>Straight Exit Mode/Off Set Mode</b>	
Function	Exit paper without treatment on the main tray
Media Size	A4, A4S, B5, ISOB5, B5S, ISOB5S, 9" x 11", 8.5" x 11", 8.5" x 11"S, 16K, 16KS, SRA3, A3, B4, ISOB4, SRA4, SRA4S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, A5, A5S, B6S Tab paper (A4, 8.5" x 11")
Min.	128 x 148 mm
Max.	314 x 458 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	3,000 sheets: A4, A4S, B5, ISOB5, B5S, ISOB5S, 9" x 11", 8.5" x 11", 8.5" x 11"S, 16K, 16KS 1,500 sheets: SRA3, A3, B4, ISOB4, SRA4, SRA4S, 12" x 18", 11" x 17", 8.5" x 14", 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K Tray Capacity differs on Media Weight: 80 gsm or less 1,500 sheets 81 – 135 gsm 1,000 sheets 136 – 209 gsm 700 sheets 210 – 300 gsm 500 sheets 500 sheets: A5, A5S, B6S
<b>Staple Mode</b>	
Function	After staple, exit the paper on the main tray
Media Size	A3, B4, ISOB4, SRA4S, A4, A4S, B5, ISOB5, B5S, A5, 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")
Min.	182 x 148 mm
Max.	314 x 458 mm Banner Paper – 330.2 x 1200 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 209 gsm (down to 60 gsm for Post inserted media)

Accessories					
FS-531 – Staple Finisher <small>continued</small>		Option			
Staple page		<b>Plain</b>	<b>Fine</b>	<b>Color</b>	<b>Coated</b>
	80 gsm	50 sheet	50 sheet	50 sheet	40 sheet
	105 gsm	40 sheet	30 sheet	30 sheet	25 sheet
	135 gsm	30 sheet	30 sheet	25 sheet	20 sheet
	209 gsm	20 sheet	20 sheet	15 sheet	—
Staple position	Front 1, Rear 1, Center 2				
Tray Capacity	2 – 9 stapled sheets:		100 sets (paper length max: 417 mm)		
			50 sets (paper length: 418 mm or more)		
	10 – 20 stapled sheets:		50 sets		
	21 – 30 stapled sheets:		30 sets		
	31 – 40 stapled sheets:		25 sets		
41 – 50 stapled sheets:		20 sets			
<b>Sub Tray Mode</b>					
Function	Exit paper without treatment on the sub tray.				
Media Size	SRA3, A3, B4, SRA4, SRA4S, A4, A4S, B5, ISOB5, B5S, ISOB5S, A5, A5S, B6S, ISOB6S, A6S, 13" x 19", 12" x 18", 11" x 17", 8.5" x 14", 9" x 11", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS Tab paper (A4, 8.5" x 11")				
Min.	100 x 148 mm				
Max.	330 x 487 mm				
Media Type	Plain, Fine, Color Specific, Coated				
Media Weight	62 – 300 gsm				
Tray Capacity	100 sheets				
Optional	Punch kit (PK-512) Post inserter (PI-502)				
Dimension (WxDxH)	16.69" x 25.82" x 39" (excl. Main tray)				
	Width incl. Main tray (retracted): 26.56" Width incl. Main tray (extended): 31.12"				
Weight	Approximately 132.28 lb (60 kg)				
Power Source	From main body				
Power Consumption	80 W or less				

Accessories	
PK-512 - Punch Kit	Option
Product Name	PK-512
Type	2/3 holes (Selectable)
Compatibility	FS-612, FS-531
<b>Media Size</b>	
2 holes	A3, B4, SRA4S, A4, A4S, B5, B5S, A5, A5S, 11" x 17", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 5.5" x 8.5"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 8K, 16K, 16KS
3 holes	A3, B4, A4, B5, 11" x 17", 8.5" x 11", 8K, 16K)
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	60 - 128 gsm
Hole Diameter	2 holes: 6.5 mm/80 mm 3 holes: 8.0 mm/80 mm
Adjustment	± 5.0 mm
Dimension (WxDxH)	5.12" x 18.5" x 4.53"
Weight	Approximately 6.61 lb (3 kg)
Power Source	From main body
Power Consumption	Less than 40 W

Specification & Installation Guide  
 AccurioPress C3080/C3080P/C3070  
 AccurioPrint C3070L

Accessories	
OT-510 - Output tray	Option
Product Name	OT-510
	
Description	Open Stacker
Media format	SRA3, SRA4, A3, B4, ISOB4, SRA4S, A4, A4S, B5, ISOB5, B5S, A5, ISOB5S, A5S, ISOB6S, B6S, A6S, 13" x 19", 12" x 18", 11" x 17", 9" x 11", 8.5" x 14", 8.5" x 11", 8.5" x 11"S, 8.5" x 13", 8.25" x 13", 8.125" x 13.25", 8" x 13", 5.5" x 8.5"S, 8K, 16K, 16KS, Tab paper <sup>2</sup> (A4, 8.5" x 11")
<b>Media Size</b>	
Min.	95 x 133 mm (Envelope: Width 90mm~)
Max.	331 x 488 mm (with MK-740: Max. 1300mm)
Media weight	40 – 350 gsm
<b>Stacking Capacity</b>	
5 ½ x 8 ½	750 sheets
8 ½ x 11	4,200 sheets (Offset stacking: 1,500 sheets)
8 ½ x 11 or larger	2,000 sheets (Offset stacking: 1,500 sheets)
Envelope	100 envelope or more
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
Dimension (WxDxH)	33.23" x 28.46" x 40.16"
Weight	Approximately 194 lb (88kg)
Power Consumption	144W or less
Remark	OT-510 cannot be combined with RU-509, only connectable to main body

<b>Accessories</b>	
<b>OT-511 - Output tray</b>	<b>Option</b>
Product Name	OT-511
Description	Simple output tray for up to 150 sheets
<b>Media Size</b>	
Min.	100 x 148 mm
Max.	330 x 487 mm
Media Type	Plain, Fine, Color Specific, Coated
Media Weight	62 – 350 gsm
Tray Capacity	150 sheets
Compatibility	AccurioPress C3080/C3080P/C3070 AccurioPrint C3070L
Dimension (WxDxH)	15.67" x 25.39" x 32.6" (tray retracted) 20.39" x 25.39" x 32.6" (tray extended)
Weight	Approximately 17.42 lb (1.85 kg)
Power Source	Not required
Remark	OT-511 cannot be combined with other paper output options



<b>Controllers</b>	
<b>External EFI Controller</b>	<b>Option</b>
Product Name	IC-313 V2
Compatibility	AccurioPress C3080/C3080P/C3070
<b>External CREO Controller</b>	<b>Option</b>
Product Name	IC-314 V2
Compatibility	AccurioPress C3080/C3080P/C3070
<b>Internal EFI Controller</b>	<b>Option</b>
Product Name	IC-417 V2
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
<b>Internal Konica Minolta Controller</b>	<b>Option</b>
Product Name	IC-605A
Compatibility	AccurioPress C3080/C3070/AccurioPrint C3070L
<b>Internal Konica Minolta Controller</b>	<b>Option</b>
Product Name	IC-605B
Compatibility	AccurioPress C3080P

IC-313 External EFI	
<b>Hardware</b>	
Architecture	External Server
Compatibility	AccurioPress C3080/C3080P/C3070
OS	Microsoft® Windows® 10 IoT Enterprise 2016 LTSB Fiery FS300 Pro system software
CPU	Intel® Core™ i5-4570S processor, up to 3.60 GHz, quad core
RAM std	4 GB
HDD	2 TB SATA
Monitor, Keyboard, Mouse, Stand	Optional (FACI kit)
PDL	Adobe PostScript 3 (3020), PDF 1.7, PPML v3.0GA, APPE 3.0, PCL 5/6 emulation
VDP Formats	Freeform v1 and v2.1, PPML v3.0, PDF/VT-1 and PDF/VT-2, Creo VPS
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour
Scan Data Format	PDF, TIFF, JPEG
<b>IC-313 Options</b>	
	Fiery Integrated Workstation (FACI Kit)
	Fiery GAPPE (Graphic Arts Package Premium Edition)
	Fiery Compose
	Fiery Impose
	Fiery JobMaster
	Color Profiler V4 Suite
	ES-2000

<b>IC-314 External CREO</b>	
<b>Hardware</b>	
Architecture	External Server
Compatibility	AccurioPress C3080/C3080P/C3070
OS	Microsoft Windows 10 Enterprise 2016 LTSC
CPU	Intel Core i7-4790S 3.2 GHz
RAM std	12 GB (7 GB: system memory, 5 GB: image memory)
HDD	3 x 1 TB (1 TB system disk, 2 x 1 TB image disks)
Monitor	22" Standard
Keyboard, Mouse	Yes
Stand	Optional
PDL	Adobe Postscript CPSI 3020, APPE 3.4
VDP Formats	Creo VPS, PPML, PDF/VT-1 and PDF/VT-2
Printing method	TCP/IP, SMB, LPR, Bonjour
Scan Data Format	PDF, TIFF, JPEG
<b>IC-314 Options</b>	
	Stand
	Action Pack Option
	Fast Pack Option
	Match Pack Option
	Preps Pack Option
	Trans Pack Option

<b>IC-417 Embedded EFI</b>	
<b>Hardware</b>	
Architecture	Embedded
Compatibility	AccurioPress C3080/C3080P/C3070; AccurioPrint C3070L
OS	Linux
CPU	Intel® Celeron® Processor G1820 2M cache, 2.70 GHz, dual core
RAM std	2 GB
HDD	500 GB
Monitor, Keyboard, Mouse	No
Mouse	No
Stand	No
PDL	Adobe PostScript3 (PS3020), PDF 1.7), PCL 5/6 emulation
VDP Formats	FreeForm v1 enhanced and v2.1
Printing Method	TCP/IP, SNMP, SMB, FTP, LPR, IPP, Bonjour
Scan Data Format	PDF, TIFF, JPEG
<b>IC-417 Options</b>	
	Productivity Pack
	Auto Trapping
	Hot Folders/Virtual Printers
	Fiery Compose
	Fiery Impose
	Fiery JobMaster
	Color Profiler V4 Suite

IC-605 A/B Internal Konica Minolta			
<b>Hardware</b>			
Architecture	Internal		
Compatibility	IC-603A: AccurioPress C3080/C3070; AccurioPrint C3070L IC-603B: AccurioPress C3080P		
OS	Linux 64 bit		
CPU	Core i5 2400 3.1 GHz	Pentium G850 2.9 GHz	
Clock speed	2.9 GHz	3.2 GHz	
RAM	<b>C3080/C3070</b>	<b>C3080P</b>	<b>C3070L</b>
	Maximum 18 GB	Maximum 16 GB	Maximum 14 GB
	Details:	Details:	Details:
	10 GB (Main Body) +4 GB (IC-605A) +4 GB (UK-104)	4 GB (Main Body) +8 GB (IC-605B) +4 GB (UK-104)	10 GB (Main Body) +4 GB (IC-605A) (UK-104 not compatible)
HDD	3.5 TB (IC-603 + UK-104) 3.5 TB (IC-603 + UK-104) 3.0 TB (UK-104 not compatible)		
Monitor, Keyboard, Mouse	N/A		
Stand	N/A		
PDL	Adobe PostScript3 (PS3020), PDF direct print (PDF version 1.7), APPE (version 4.6) (UK-104 and UK-218 is required), PDF and VT-2 (UK-104 and UK-218 is required), TIFF direct print (TIFF version 6 compliance), PPML (version 2.2), PCL-5c compatible, PCL XL (PCL6 version 3) compatible		
VDP Formats	PPML (version 2.2), PDF VT-2 (UK-104 and UK-214 is required)		
Printing Method	Pserver (IPX, SPX), LPD and LPR (TCP/IP), IPP (TCP/IP), AppleTalk (EtherTalk), Bonjour (TCP/IP), Web service printing (TCP/IP), NPrinter and RPrinter (IPX, SPX), Raw Port (TCP/IP), SMB		
Scan Data Format	PDF, TIFF, JPEG		
<b>IC-603 Options</b>			
Compatibility	AccurioPress C3080/C3080P/C3070		
	UK-104 (Expanded Memory) includes 500 GB HDD, 1x RAM of 4 GB		
	UK-214 (APPE Option) (UK-104 is required with UK-214)		

Consumables	
<b>Toner TN619</b>	
TN-619C	Cyan Toner
TN-619M	Magenta Toner
TN-619Y	Yellow Toner
TN- 619K	Black Toner
Compatibility	AccurioPress C3080/C3080P/C3070
Type	Intermediate hopper + rotary toner cartridge
Yield K	66,500
Yield Y	71,000
Yield M	54,500
Yield C	78,000
<b>Toner TN620</b>	
TN620C	Cyan Toner
TN620M	Magenta Toner
TN620Y	Yellow Toner
TN620K	Black Toner
Compatibility	AccurioPrint C3070L
Type	Intermediate hopper + rotary toner cartridge
Yield K	60,000
Yield Y	64,000
Yield M	49,000
Yield C	70,000
<b>Developer DV614</b>	
DV614C	Cyan Developer
DV614M	Magenta Developer
DV614Y	Yellow Developer
DV614K	Black Developer
Compatibility	AccurioPress C3080/C3080P/C3070/AccurioPrint C3070L
Lifetime CMYK	1,200,000
<b>Drum DU-105</b>	
DU-105	Drum for Cyan, Magenta, Yellow & Black
Compatibility	AccurioPress C3080/C3080P/C3070
Type	OPC
Lifetime	460,000
<b>Drum DU-106</b>	
DU-106	Drum for Cyan, Magenta, Yellow & Black
Compatibility	AccurioPrint C3070L
Type	OPC
Lifetime	410,000

<b>Consumables</b> <small>continued</small>		
<b>Staples for FS-612</b>		
MS-5C		4448121
Compatibility		FS-612
Content		3 x 5,000 staples
<b>Staples for FS-532</b>		
SK-703		A4RCWY1
Compatibility		FS-532
Content		5 x 5,000 staples
<b>Staples for SD-506</b>		
SK-601		14YH
Compatibility		SD-506
Content		3 x 5,000 staples
<b>Staples for SD-513</b>		
SK-601H		A85VWY1
Compatibility		SD-513/SD-506
Content		3 x 5,000 staples
<b>Staples for FS-531/SD-510</b>		
SK-602		14YK
Compatibility		FS-531, SD-510
Content		3 x 5,000 staples

<b>Item Numbers</b>		
<b>Engine</b>		
AccurioPress C3080		A9VE011
AccurioPress C3080P		AAC2011
AccurioPress C3070		AAC3011
AccurioPrint C3070L		AAC4011
<b>System</b>		
Original Cover OC-511		A3PMWY1
Document Feeder DF-706		A782WY2
Working Table WT-511		A57UWY1
Envelop Fuser EF-103		A57VW11
Heating Unit HT-511		A5VKWY1
PATLITE Indication Lamp		LES402A

*continued*

Specification & Installation Guide  
 AccurioPress C3080/C3080P/C3070  
 AccurioPrint C3070L

Item Numbers	
Accessories	
Paper Feeding Unit PF-602m	A0U4WY3
Heating Unit HT-504	A0410Y1
Paper feeding Unit PF-707m	A55CWY2
Heating Unit HT-506	A1RKWY1
Large Capacity Tray LU-202m	A03WWY2
Large Capacity Tray LU-202XL	A8K4WY1
Large Capacity Tray LU-202XLm	A8K4WY2
Heating Unit HT-503	A0410Y0
Heating Unit HT-515	A041WY1
Bypass Tray MB-506	A57WWY2
Bypass Tray MB-508	AA01WY1
FA-502 Feed Adjuster	A69EWY1
MK-740 Baner Feeding Kit	A7XVWY2
MK-740m Baner Feeding Kit	A7XVWY3
Stapling Finisher FS-531	A2A4WY2
All-In-One Finisher FS-612	A1TVWY2
Punch Kit PK-512 (Option FS-612, FS-531)	A04F0Y1
Output Tray OT-510	A93JWY2
Output Tray OT-511	A043WY1
Relay Unit RU-518	A9CEWY1
Humidification Unit HM-103	A9CFWY1
Booklet Making Unit SD-506	A0H2WY2
Booklet Making Unit SD-513 (Back)	A65UWY1
Booklet Making Unit SD-513 (Front)	A729WY1
Spine Corner Forming Unit FD-504	A65VWY1
Slitting Unit TU-503	A65WWY1
Creasing Unit CR-101	A65XWY1
Folding and Punching Unit FD-503	A0H0W11
Stapling Unit FS-532	A4F3WY4
PI-502 for FS-532	A04HWY2
MK-732 for PI-502	A4F5WY1
SD-510 for FS-532	A4F4WY1
PK-522 for FS-532	A4FAW12
Stacking Unit LS-506	A660WY
Extra Cart LC-501	A1AHWY2
Perfect Binding Unit PB-503	A15XW11
Multi-Punch (GBC) GP-501	A0N9W11

*continued*



Specification & Installation Guide  
 AccurioPress C3080/C3080P/C3070  
 AccurioPrint C3070L

Item Numbers	
Accessories <small>continued</small>	
Buffer Unit RU-510 (required for GP-501)	A4FCWY1
3-Hole Die Set for GP-501 DS-501	A0NAW11
19 Hole Cerlox Die Set for GP-501/DS-502	A0NCW11
32 Hole WireBind Die Set for GP-501/DS-503	A0NDW11
21 Hole WireBind Die Set for GP-501/DS-504	A0NEW11
44 Hole Color Coil Die Set for GP-501/DS-505	A0NFW11
11 Hole Velobind Die Set for GP-501/DS-506	A0NGW11
32 Hole Proclick Die Set for GP-501/DS-507	A0NHW11
GBC 44 Oval Hole Die for GP-501	7640017527
GBC 3-Hole DuraGlide HD Die Set	7714357
GBC 19-Hole DuraGlide HD Die Set	7714355
Auto Ring Binding Unit GP-502	A4F6W12
GBC Punch G2 (Requires at least one Die Set)	7718800
2/4 Hole Die – 8mm	7714906
3 Hole Die – 8mm	7714904
3 Hole Die – 8mm, HD	7714918
3/5/7 Hole Die – 8mm	7714905
CombBind Die – 19H	7714911
CombBind Die – 19/21H HD	7714919
Oval Coil Die – 43/ 44H	7714914
Round Coil Die – 43/44H	7714901
Round Coil Die – 44/47H HD	7714917
Round Wire 2:1 Die – 32H	7714902
Round Wire 3:1 Die – 21H	7714903
Square Wire Die 2:1,	7714912
Square Wire Die 3:1,	7714913
VeloBind Die – 11 Hole, Ltr	7714909

*continued*

Item Numbers	
Controller	
<b>Konica Minolta Controller</b>	
IC-605A	AAN00Y1
IC-605B	AAN10Y1
UK-104 (HDD Expansion Kit)	A5XJWY2
UK-218 (APPE Option)	AAMYWY1
<b>External EFI Fiery Controller</b>	
IC-313	A9F5WY3
VI-509	A9G1WY2
Fiery GAPPE	45111100
Fiery Impose	45111134
Fiery Compose	45111136
Fiery Impose+Compose	45111138
Fiery JobMaster	45112179
Fiery JobMaster (Annual Support and Maintenance)	100000006366
FACI kit	45151789
EFI Option Bundle for IC-308 – 22 in FACI+CPS+Imp+JM+Gappe	45152665
Fiery Color Profiler Suite V 4.0 with ES-2000 Spectrophotometer	3000005452
EFI Color Profiler Suite V4.x Software Only	3000005453
ES-2000 Spectrophotometer	45109642
<b>Internal EFI Fiery Controller</b>	
IC-417	A9F7WY2
VI-509	A9G1WY2
EFI Hot Folders & Virtual S/W License	45111142
EFI Auto Trap S/W License	45111094
EFI Productivity Package S/W License	45111156
Fiery Impose	45111134
Fiery Compose	45111136
Fiery Impose+Compose	45111138
Fiery Color Profiler Suite V 4.0 with ES-2000 Spectrophotometer	3000005452
EFI Color Profiler Suite V4.x Software Only	3000005453
ES-2000 Spectrophotometer	45109642

*continued*

Item Numbers	
Consumables	
Toner black TN-619K (C2070/C2070P/C2060)	A3VX130
Toner Yellow TN-619Y (C2070/C2070P/C2060)	A3VX230
Toner Magenta TN-619M (C2070/C2070P/C2060)	A3VX330
Toner Cyan TN-619C (C2070/C2070P/C2060)	A3VX432
Toner Black TN-620K (C2060L)	A3VX131
Toner Yellow TN-620Y (C2060L)	A3VX231
Toner Magenta TN-620M (C2060L)	A3VX331
Toner Cyan TN-620C (C2060L)	A3VX431
Developer Black DV-614K	A3VX600
Developer Yellow DV-614Y	A3VX700
Developer Magenta DV-614M	A3VX800
Developer Cyan DV-614C	A3VX900
Drum DU-105	A5WH0Y0
Drum DU-106	A5WJ0Y0
Staple Cartridge MS-5C	4448121
Staple Cartridge SK-703	A4RCWY1
Staple Cartridge SK-601	14YH
Staple Cartridge SK-601H	A85VWY1
Staple Cartridge SK-602	14YK
Hot Melt Glue Chip GC-501	A0800Y0

Paper Weight Conversion Chart					
Paper Weight	Bond	Book	Bristol	Cover	Index
40 – 49 gsm	11 – 13 lb	27 – 33 lb	18 – 22 lb	15 – 18 lb	22 – 27 lb
50 – 61 gsm	14 – 16 lb	34 – 41 lb	23 – 28 lb	19 – 23 lb.	28 – 34 lb
62 – 74 gsm	17 – 20 lb	42-50 lb	29-34 lb	24 – 27 lb	35-41 lb
75-91 gsm	21 – 24 lb	51 – 61 lb	35 – 42 lb	28-34 lb	42 – 50 lb
92 -135 gsm	25-36 lb	62 – 91 lb	43-62 lb	35 – 50 lb	51 – 75 lb
136 – 162 gsm	37 -43 lb	92 -109 lb	63 – 74 lb	51 – 60 lb	76-90 lb
163-216 gsm	44 – 57 lb	110 – 146 lb	75 – 99 lb	61 – 80 lb	91 -119 lb
217 – 244 gsm	58 – 65 lb	147 -165 lb	100 – 111 lb	81 – 90 lb	120-135 lb
245-300 gsm	66 – 80 lb	166 – 203 lb	112 – 137 lb	91 -111 lb	136-166 lb
301-350 gsm	81 – 93 lb	204 – 237 lb	138 – 160 lb	112-129 lb .	167 -194 lb
Paper Weight	Tag	A – Book	Lb – Book	Duodecimo	Octavo
40-49 gsm	25-30 lb	22-27 kg	33-40.5 kg	34.5-42 kg	24-29 kg
50-61 gsm	31 – 37 lb	27.5 – 33.5 kg	41 – 50.5 kg	42.5 – 52.5 kg	29.5 – 36.5 kg
62 – 74 gsm	38 – 45 lb	34-40.5 kg	51 – 61.5 kg	53-63.5 kg	37 -44 kg
75-91 gsm	46 – 56 lb	41 -50 kg	62 – 75.5 kg	64 – 78 kg	44.5 – 54.5 kg
92-135 gsm	57 – 83 lb	50.5 – 74 kg	76-112 kg	78.5 -116 kg	55-80.5 kg
136 – 162 gsm	84 – 100 lb	74.5 – 89 kg	112.5 – 134.5 kg	116.5 -139 kg	81 – 96.5 kg
163-216 gsm	101 – 133 lb	89.5-119 kg	135-179 kg	139.5 – 185.5 kg	97 – 129 kg
217 -244 gsm	134 -150 lb	119.5 -134 kg	179.5 – 202.5 kg	186 – 209.5 kg	129.5 – 145.5, kg
245-300 gsm	151 -184 lb	134.5 – 165 kg	203-249 kg	210-258 kg	146-179 kg
301-350 gsm	185 – 215 lb	165.5 – 192.5 kg	249.5 – 290.5 kg	258.5 – 301 kg	179.5 – 209 kg

### Security Strengthen Mode

The following items will have enhanced security.

#### **Machine NIC Setting**

While the Security Strengthen mode is activated, available function is limited to CS Remote Care.

#### **External Access Prohibited**

No access is allowed over telephone lines other than CS Remote Care.

#### **Create, Save and Analyze an Audit Log**

A history of security function operations will be created and saved. Date and time, information identifying the person who made the operation, details of the operation, and results of the operation will be saved, enabling analysis of unauthorized access. This log will be overwritten if the audit area is depleted.

#### **Machine Manager Authentication**

A service representative will set up an authentication data for a machine manager. The machine manager must input a password to gain authorized access. Only one authentication string can be registered per machine.

#### **Machine Manager Setting Mode**

If the Machine Manager Setting mode has been entered by successful Manager authentication, the setting change of various machine functions will be available on the machine. Be sure to exit the Machine Manager Setting mode if you leave in front of the machine while using the Machine Manager Setting mode.

#### **Enhanced Passwords**

There are five different passwords provided for security functions:

- CE Authentication Password
- Administrator Password
- User Password
- Account Password
- HDD Lock Password

## Security Strengthen Mode

### SECURITY FUNCTIONS

#### Security Mode

The AccurioPress C3080/C3080P/C3070 and AccurioPrint C3070L have two security modes.

#### Normal Mode

Use this mode when the machine is used by a single person and there is low possibility of illicit access or operation. This mode is already set as factory default. To use the machine in normal mode, refer to the user's guides provided for each operation.

#### Enhanced Security Mode

Use the Enhanced Security mode when the machine is connected to a local area network, or to external networks through a telephone line or other means. An administrator determined for the machine management should follow the instructions in this guide, so that users can have a safe operating environment.

To use the Enhanced Security mode, contact your service representative for the following settings.

A service representative should set a CE password for CE authentication and administrator password on the machine. The service representative uses the CE password for CE works. The administrator, who obtains the administrator password from the service representative, uses that password to make settings related to the Enhanced Security mode.

The administrator should never leak the administrator password out to others.


The administrator who acquired the administrator password manages the machine set up with the Enhanced Security mode by making settings in the following order:

1. Turning On/Off the Enhanced Security Mode
2. HDD Lock Password
3. Adding/Changing/Deleting Registered Users

The administrator is also responsible in providing users with the following instructions:

- Never leak his/her password out to others.
- Be sure to log out when completing the machine operation after logging in upon the user authentication.

Please be sure to use the Enhanced Security mode to prevent unauthorized access to HDD.

With the Enhanced Security mode activated, the machine displays a security icon  in the lower right area of the touch panel.

The security icon disappears when the Enhanced Security mode is deactivated. If the administrator accidentally deactivates the Enhanced Security mode, contact your service representative. You should ask a customer engineer (CE) to check the security environment and settings before activating the Enhanced Security mode again.

## Security Strengthen Mode

### ENVIRONMENT

#### Environment in which the Enhanced Security Mode is Recommended

An environment where the machine is monitored by a telephone line or a network.

#### Creating a Secure Environment

For security, we recommend that supervisors and an administrator use the Enhanced Security mode and establish an environment as follows.

Secure print files and authentication print files are not encrypted during transmission from a client PC to the machine. Implement measures against wiretapping, such as installing a cryptographic communication device or antibugging equipment, in order to protect secure print files and authentication print files.

- **Qualifications to be an Administrator**

A supervisor selects a reliable person who has adequate knowledge, technical ability, and experience as an administrator, to whom to delegate administration of the machine.

- **Guarantee of Customer Engineer (CE)**

A supervisor or an administrator can use the Enhanced Security mode after confirming that a service contract has been signed with a customer engineer (CE). Clearly state in the service contract that the customer engineer (CE) will not engage in any fraudulent actions.

- **Secure LAN**

Be sure to connect the machine to a local area network protected by firewall in order to prohibit access from external networks. Be also sure not to have any illicit device connected to the LAN.

- An administrator should designate the installation location to be available only for product users. Install the machine in a place securely locked during the night, and during the day in a place that allows the administrator to monitor the machine, so that any parts such as an HOD should not get stolen or any special device such as an internal analyzer should not be hooked up to the machine. Equipment removed from the main body, such as an HOD, should also be managed similar to the main body.
- An administrator is required to be present at customer engineer (CE) works such as installation or maintenance.
- An administrator should check at regular intervals that the date/time setting is correctly made on the machine.

### DESCRIPTION OF ENHANCED SECURITY MODE

Security functions will be enhanced as follows:

#### Protecting and Deleting of Remaining Data after Being Used

There are two types of Image data stored in memory or HDD: AHA compressed data and uncompressed data, which are TIFF format, PDF format, and PS data. The image area of memory or HDD with AHA compressed data is released after clearing the used data. In normal mode, the data is not completely deleted, which may allow for unauthorized reading of the data. In Enhanced Security mode, the image area of memory or HOD is overwritten with data unrelated to the image before the area is released, irrespective of whether the stored image data is compressed.

## Security Strengthen Mode

### Enhanced Passwords

There are 5 different passwords provided for security functions.

- CE password
- Administrator Password
- User Password
- Account Password
- HDD Lock Password

The CE password and administrator password should be comprised of 8 alphanumeric characters (the alphabetic characters are case-sensitive).

The account password should be made from 1 to 8 alphanumeric characters (case-sensitive).

The user password is normally made from 1 to 64 alphanumeric characters (case-sensitive); however, the user password less than 8 characters cannot be used in the Enhanced Security mode. If you enter 64 or more characters, the last entered character will be identified as the 64th character.

The HDD lock password should be made from 8 to 32 alphanumeric characters (case-sensitive). If you enter 32 or more characters, the last entered character will be identified as the 32nd character.

As for the CE password, administrator password and account password, the machine recognizes the last entered character as the eighth character if 8 or more characters are entered.

The machine in the Enhanced Security mode also refuses any entry for 5 seconds, if a wrong password is entered for one of the 5 passwords mentioned above.

Should you forget any security-related password, take action as follows depending on the type of password.

- For a user password or account password, please contact your administrator.
- If you have forgotten the administrator password or HDD lock password, please contact your service representative.

We recommend that each password should be changed on a regular basis in order to prevent illicit access or falsification of data.

### Data Access

Ensure that a user is required to enter an enhanced password which has been set by the administrator, in order to save data into the user box stored in HDD or output the stored data.





**Notes**

**Notes**

## Partnership.

Konica Minolta can help give shape to your ideas and partner with you to achieve your corporate objectives. Contact us to realize opportunities in:

### Information Management

Enterprise Content Management (ECM)  
Document Management  
Automated Workflow Solutions  
Business Process Automation  
Security and Compliance  
Mobility  
eDiscovery Services

### IT Services

Application Services  
Cloud Services  
IT Security  
Managed IT Services  
IT Consulting & Projects

### Technology

Office Multifunction Business Solutions  
Commercial and Production Printers  
3D Printers  
Wide Format Printers  
Laptops, Desktops and Computer Hardware  
Servers and Networking Equipment  
Managed Print Services (MPS)  
Managed Enterprise Services

For complete information on Konica Minolta products and solutions, please visit: [CountOnKonicaMinolta.com](http://CountOnKonicaMinolta.com)

©2018 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo, bizhub and Giving Shape to Ideas are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.



**KONICA MINOLTA**

KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC.  
100 Williams Drive, Ramsey, New Jersey 07446

[CountOnKonicaMinolta.com](http://CountOnKonicaMinolta.com)



Item #: C2070SeriesSIG  
03/15/2018-A